

# F-touch

QL-500


QL-560

QL-650TD

QL-1050

QL-1050N

## Software User's Guide

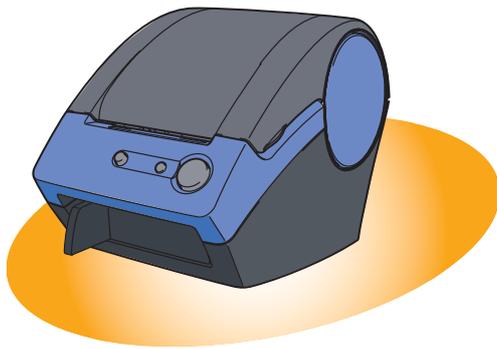

QL-500



QL-650TD



QL-560



QL-1050/1050N

# Contents

## **Contents ..... 2**

## **Introduction ..... 4**

About This Manual .....	4
Manual Structure .....	4
Symbols Used in this Manual .....	4

## **Creating Labels (For Windows) ..... 5**

Label Creation Overview .....	5
From Label Creation to Printing .....	5
How to Use P-touch Editor .....	7
Starting P-touch Editor .....	7
Creating an Address Label .....	9
Printing a Label .....	10
Saving a Label .....	11
Opening a Label File .....	11
Creating Different Types of Labels .....	12
Using P-touch Editor Help .....	13
Creating Labels Efficiently .....	15
Creating Labels with Other Applications .....	26
How to Use the P-touch Address Book .....	33
Starting the P-touch Address Book .....	33
Creating a New Contact .....	35
Importing Contact Data .....	36
Editing the Contact Data .....	37
Printing the Label .....	38
How to Use P-touch Transfer Manager & P-touch Library .....	39
Starting up P-touch Transfer Manager .....	39
Transferring label templates from the PC to the printer .....	41
Backing up label templates .....	44
Changing printer settings from the PC .....	45
Starting up the P-touch Library .....	46
Searching labels .....	47

## **Creating Labels (For Mac) ..... 48**

Overview .....	48
Procedure for Creating and Printing Labels .....	48
Using P-touch Editor .....	50
Starting the P-touch Editor .....	50
Creating an Address Label .....	53
Printing the Label .....	54
How to use the User's Guide (HTML Manual) .....	56

- Sharing the printer ..... 58
  - Using this printer as a Shared Printer ..... 58
  - Using the PS-9000 Print Server (sold separately) ..... 58
- Controlling with the ESC/P Commands ..... 59
  - Available Commands ..... 59
  - Serial Cables ..... 59
- Printing Directly from Other Applications ..... 60
  - Installing the Printer Driver ..... 60
  - Printing from Other Applications ..... 62
- Uninstalling Software ..... 63
  - For Windows ..... 63
  - For Mac ..... 64
- Specifications ..... 66
  - Product Specifications ..... 66
  - Operating Environment ..... 67

# Introduction

The Brother QL-500/QL-560/QL-650TD/QL-1050/QL-1050N label printer (hereafter referred to as "the printer") enables you to quickly and easily print custom labels created with the label software, P-touch Editor. In addition, with the Brother QL-650TD you can download label designs from your PC, then print them without the use of the PC (stand-alone use).

## ▶ About This Manual

This manual is a "PDF manual" included on the supplied CD-ROM.



In this manual, when the mouse pointer changes to  you can just click to jump to the corresponding pages.

For the basic functions of Adobe® Reader, refer to the Adobe® Reader Help files.

## ▶ Manual Structure

The following manuals are provided to help you use the printer correctly, and understand all features. Make sure to read them before using the printer.

### ● Setup & Operation Guide (Quick Start Guide)

Read the Setup and Operations Guide before reading this Software User's Guide.

The guide includes information you should read before using the printer, such as general precautions for use, installation and setting up of the main unit, and how to create/print labels without the use of a PC (Brother QL-650TD only).

Also included is information describing how to install the accompanying software to connect the printer to a PC, and maintenance/troubleshooting of the printer.

### ● Software User's Guide (this manual)

This manual describes how to create labels using the P-touch Editor software that has been installed on a PC connected to the printer.



- If you use Windows®, this manual can be viewed from the P-touch Setup application when it is run from the CD-ROM.

After installing this manual on your PC, you can also view it from the Start menu.

- If you use a Mac®, refer to the PDF files in the [Manuals] folder on the CD-ROM.

## ▶ Symbols Used in this Manual

The symbols used throughout this guide are as follows:



This symbol indicates information or directions that should be followed. Ignoring them may result in injury, damage, or failed operations.



This symbol indicates information or directions that can help you better understand and use the printer more efficiently.


# Creating Labels (For Windows)

## Label Creation Overview

This section describes the general procedure for creating labels using the printer. For detailed step-by-step instructions, refer to the related pages or Help files.


### ► From Label Creation to Printing

#### 1 Choose the type of label you want to create.

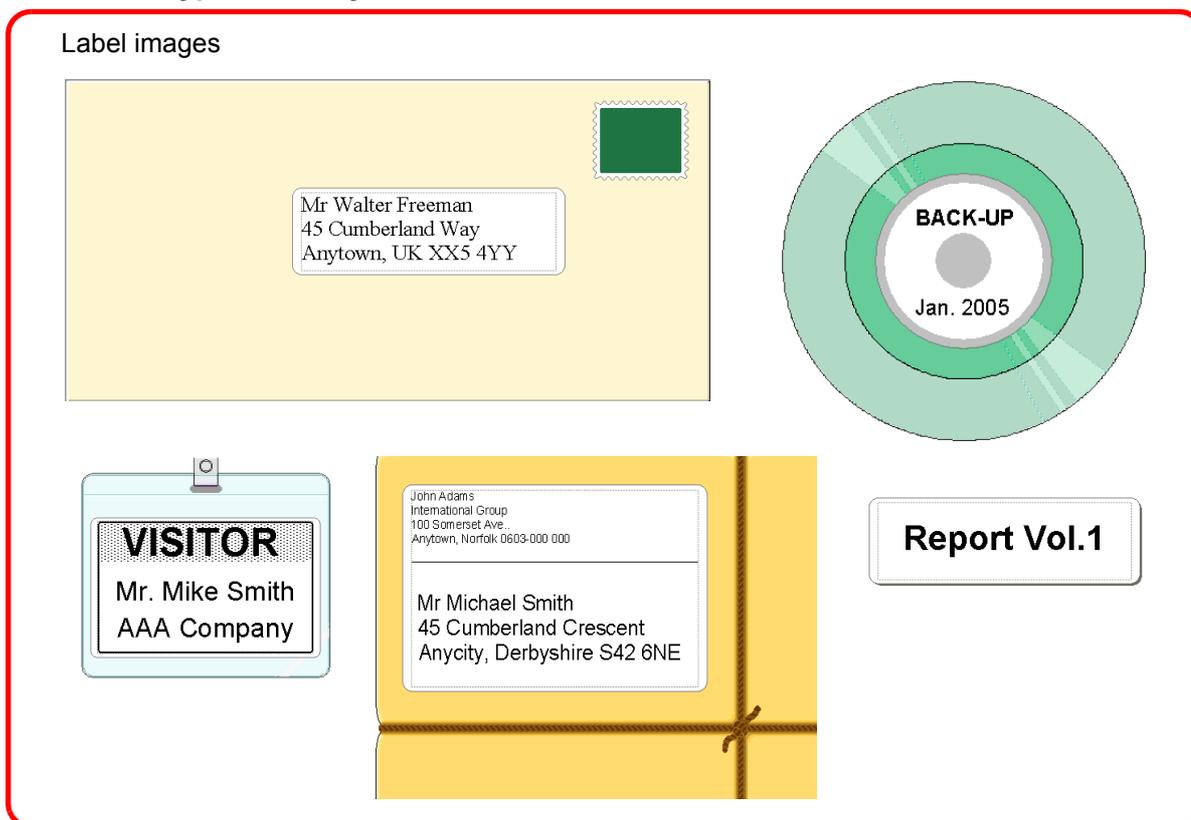

#### 2 Prepare the appropriate DK Roll for the label you want to create.

The printer is supplied with one or more sample rolls. (Other rolls can be purchased separately.)

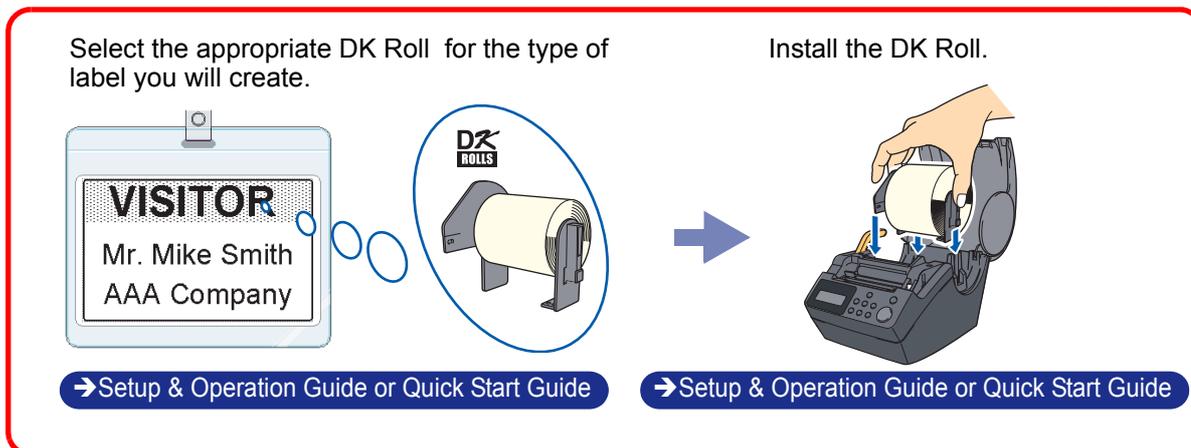


### 3 Create and print the label.

Select your preferred method: printing labels directly from the printer, or print from a PC.

#### Printing directly

Create and print a label using just the printer. (Brother QL-650TD only) The QL-1050 can also transfer templates, but it cannot select templates with machine side operation. So using the ESC/P command as you can use transfer templates.

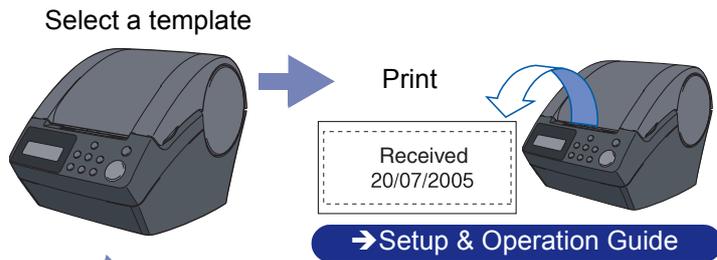

#### Printing using the PC


After creating a template with your PC, create and print the label using the printer.

Create and print the label using a PC.



#### Create and print a label using P-touch Editor.


P-touch Editor



Enter the text

→ Page 9

P-touch Editor




Create a template

→ Page 39

#### Use an application from another publisher.

Microsoft® Word/Excel/Outlook® Add-In functions

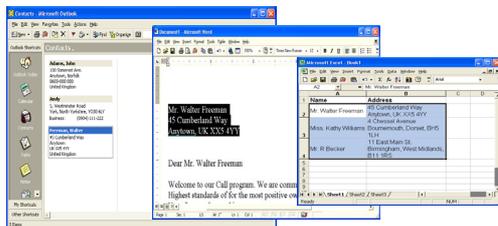

Import the text


→ Page 26

Edit the label

→ Page 7

#### Create and print a label using P-touch Address Book.

P-touch Address Book




Enter the text

→ Page 35

Import the text

→ Page 36

P-touch Address Book



Edit the label

→ Page 37

# How to Use P-touch Editor

This section explains the procedure for creating various kinds of labels using P-touch Editor.

## ▶ Starting P-touch Editor

### 1 Click [Start]-[All Programs (Programs)]-[Brother P-touch]-[P-touch Editor 4.2].



You can also start P-touch Editor using the following methods (only if you created the shortcut during installation):

- Double-click the shortcut icon on the desktop.
- Click the shortcut icon on the Quick Launch bar.



When P-touch Editor is launched, the [Startup] dialog box appears, allowing you to select whether you want to create a new label layout or open an existing label.



To specify how the P-touch Editor works when it starts, click [Tools]-[Options] to display the [Options] dialog box. In the [General] tab, you can choose the setting in the [Operations] list box in the [Startup Settings]. Normally, select [Display Startup Dialog Box].

### 2 Select an option in the [Startup] dialog box and click


.

- When you select [New layout] , [Apply Layout Style], or [Open the Last Layout Used], the layout window appears.
- When you select [Use the Auto Format Wizard], the [Auto Format Wizard] appears. This dialog box allows you to create a layout by choosing an existing template.
- When you select [Open an Existing Layout], the [Open] dialog box appears. You can use a previously saved layout. Refer to →"Opening a Label File" on page 11.
- When you select [Help-How To], the P-touch Editor Help appears.  
The Help files allow you to learn step by step how to create a label layout.
- When you select [Check for Updates] with a PC connected to the Internet, you will be taken to the Brother Solutions Center. Use this Brother Solutions Center to check for the latest software downloads and FAQs.



## Layout window

The layout window consists of the following seven sections:

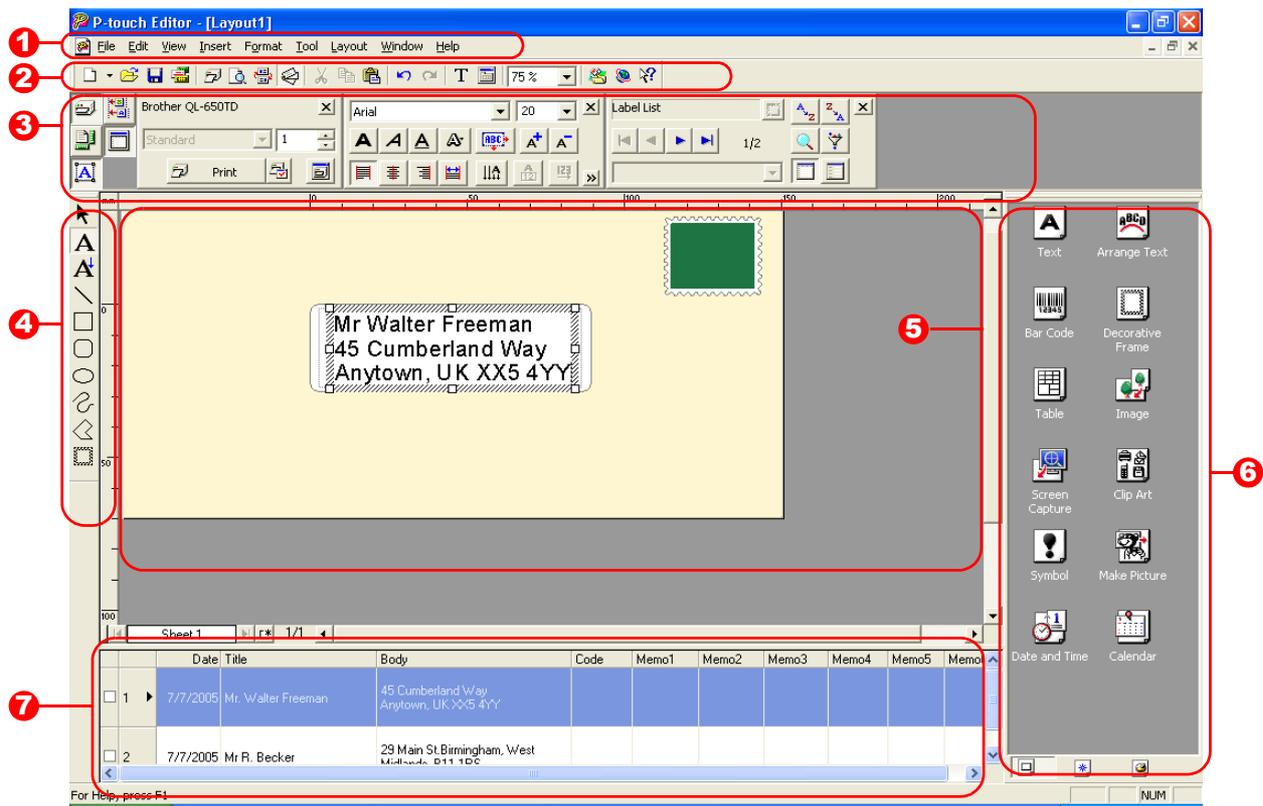

### 1 Menu

Commands are categorized under each menu (File, Edit, View, and Insert) by function.

### 2 Standard toolbar

A group of frequently used commands (New Layout, Open, Save, Auto Format, etc.) are provided in this toolbar.

### 3 Property dock

The property dock contains the Print, Page, Text, Layout, and Database property boxes. Click on the buttons at the left of the dock to show/hide the corresponding property box.

### 4 Draw toolbar

Provides tools for selecting an object, entering text, drawing graphics, and so on.

### 5 Layout work area

The layout work area is used to display and edit objects.

### 6 Object dock

Using the object dock, you can easily insert and format text, barcodes, frames, tables, figures, etc.

### 7 Label list/Database window

Displays a database or a Label List.



The [View] menu allows you to show/hide the toolbars, docks, and windows.


# ▶ Creating an Address Label

This section describes the process of creating an address label.


- 1** In the Page properties box, select [Standard Address Label] from the [Label Format] list box.

 If the Page property box is not shown in the Property dock, click  to display the box.

- The label format in the layout work area changes to Standard Address Label.
- The tape length and width settings are automatically set to the size of a standard address label.

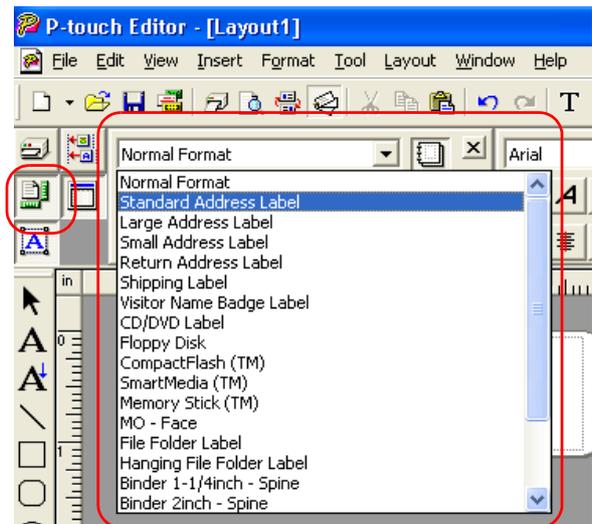

- 2** Click  (Text) in the Object dock and type in the name and address.

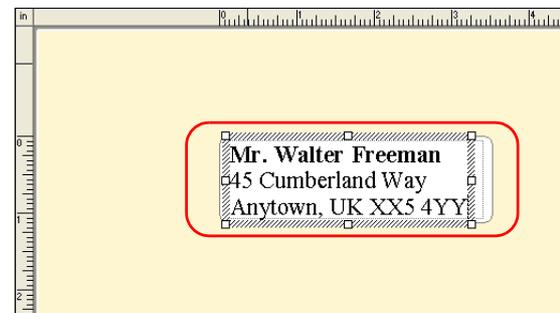


- 3** Adjust the font size.

Select the name and apply the bold () and scaled-up font size () settings using the Text property box.

Select the address and apply the scaled-down font size () setting.

-  • When the Text property box is not shown in the Property dock, click  to display the box.
- Changes made in the Text property box will be applied only to the selected text.

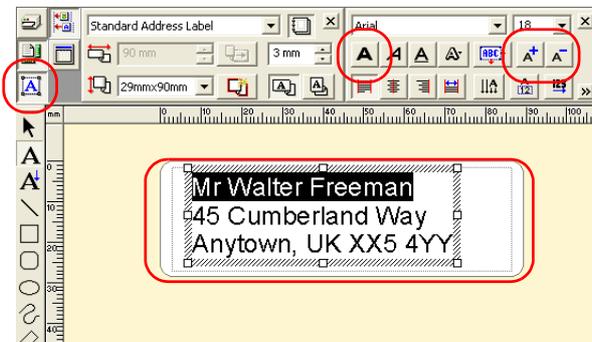

Now you are ready to print your label.


For detailed information on how to print, refer to [▶"Printing a Label"](#) on the next page.

# ▶ Printing a Label

This section explains the procedure for printing a label you have created.

- 1 In the Print property box, set the number of copies to be printed to [1] and click  Print.**

The label is printed.




-  If the Print property box is not shown in the Property dock, click  to display the box.

- 2 Cut off the printed label using the Cut button or the Cut lever (Brother QL-500) located on the front of the printer.**

-  In the [Print] dialog box, if [Auto Cut] is checked in [Options], the printed labels will be automatically cut. (Not available for QL-500)

Mr. Walter Freeman  
45 Cumberland Way  
Anytown, UK XX5 4YY




## Print Options and label cutting

When you click  in the Print property box, the [Print] dialog box appears.

This dialog box allows you to set the print options and the number of copies.

-  You can set the number of labels between cuts with the Option tab in the Print dialog box displayed when you click the Properties button. (QL-560/1050/1050N only)

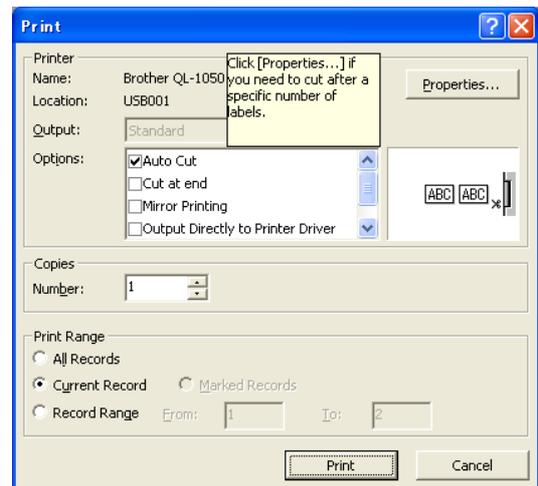

Setting		Description
Options	Auto Cut (QL-560/650TD/ 1050/1050N)	When this check box is checked, each label will automatically be cut. When this check box is not checked, labels won't automatically be cut after printing. Press the Cut button in the printer to cut.
	Cut at end (QL-560/650TD/ 1050/1050N)	When multiple labels are printed, only cuts after the final label is printed.
	Mirror Printing	When this check box is checked, labels will be printed so they can be seen when looking through a window (it is recommended that a clear DK roll is used for this purpose).
	Output directly to Printer Driver	For normal use, this check box should be checked.
Copies	Number	Used to specify the number of copies to be printed.

-  By clicking  in the [Print] dialog box, you can select more detailed settings. For example, you can specify that priority be given to printing quality or printing speed when printing labels. When you print labels that require higher quality, such as barcode labels, select [Give priority to print quality].

## ▶ Saving a Label

You can save a label you have created in a file for later use. This section explains the procedure for saving a label you have created.

### 1 Click [File]-[Save As].

The [Save As] dialog box appears.



If the same filename already exists, changes are saved to the existing file.

### 2 Select the folder where you want to save the file, enter the [File name], and then click .

The file is saved in the folder you have specified.



You can enter up to 255 characters for the [File name], the following characters are not allowed:

/ \ > < \* ? " | :



## ▶ Opening a Label File

To use a label you have saved, open the label file. This section describes the procedure for opening the label file.

### 1 Click [File]-[Open].

The [Open] dialog box appears.





### 2 Select the folder containing the file you want to open, select the file, and click .

In the layout window, the label layout from the selected file is displayed.



## ► Creating Different Types of Labels

The following are examples of the labels that can be created using various functions of the P-touch Editor. Refer to the Creating Labels section in the P-touch Editor Help for further details.

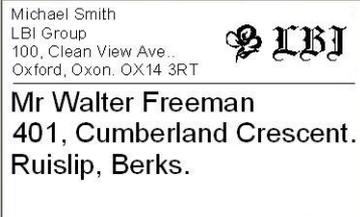Help Section	Sample Label	Process
1: Making an address label with P-touch Editor		<ul style="list-style-type: none"> <li>• Printing</li> <li>• Saving a layout</li> </ul>
2: Changing the text properties of an address label		<ul style="list-style-type: none"> <li>• Changing the font size and style</li> <li>• Adjusting text, images and other objects</li> </ul>
3: Making an address label using an Add-in		Using add-ins <ul style="list-style-type: none"> <li>• Microsoft® Word</li> <li>• Microsoft® Excel</li> <li>• Microsoft® Outlook®</li> </ul>
4: Making a label using the Label List		<ul style="list-style-type: none"> <li>• Saving to the Label List</li> <li>• Using Label List to create a new layout</li> </ul>
5: Using layout styles to create labels		<ul style="list-style-type: none"> <li>• Choosing/Changing the default layout style</li> <li>• Editing and saving a layout style</li> </ul>
6: Making a label using a database		<ul style="list-style-type: none"> <li>• Using / Connecting to a Microsoft® Excel file</li> </ul>
7: Making a banner or sign with continuous length tape		<ul style="list-style-type: none"> <li>• Specifying the label length or using auto setting</li> <li>• Inserting clip art illustrations</li> </ul>
8: Making sequential labels using the Numbering function		<ul style="list-style-type: none"> <li>• Specifying the field to increment (numbering field)</li> <li>• Printing</li> </ul>
9: Using P-touch Editor to make a label that contains a barcode		<ul style="list-style-type: none"> <li>• Selecting the barcode protocol and settings</li> </ul>
10: Making address labels with continuous length tape		<ul style="list-style-type: none"> <li>• Using tape in a vertical direction</li> </ul>
11: Making a label using the Auto Format feature		<ul style="list-style-type: none"> <li>• Using the Auto Format function</li> </ul>
12: Making a label using the P-touch Library		<ul style="list-style-type: none"> <li>• Using the P-touch Library</li> </ul>

## ▶ Using P-touch Editor Help

The P-touch Editor Help offers detailed information on available features and explains on how to use P-touch Editor.

### ● Opening the Help files


#### 1 Start P-touch Editor

Refer to →"Starting P-touch Editor" on page 7.  
The layout window appears.

#### 2 Click [Help]-[P-touch Editor Help]. Or, press the [F1] key on the keyboard.

The [P-touch Editor4 Help] window appears.

### P-touch Editor Help window

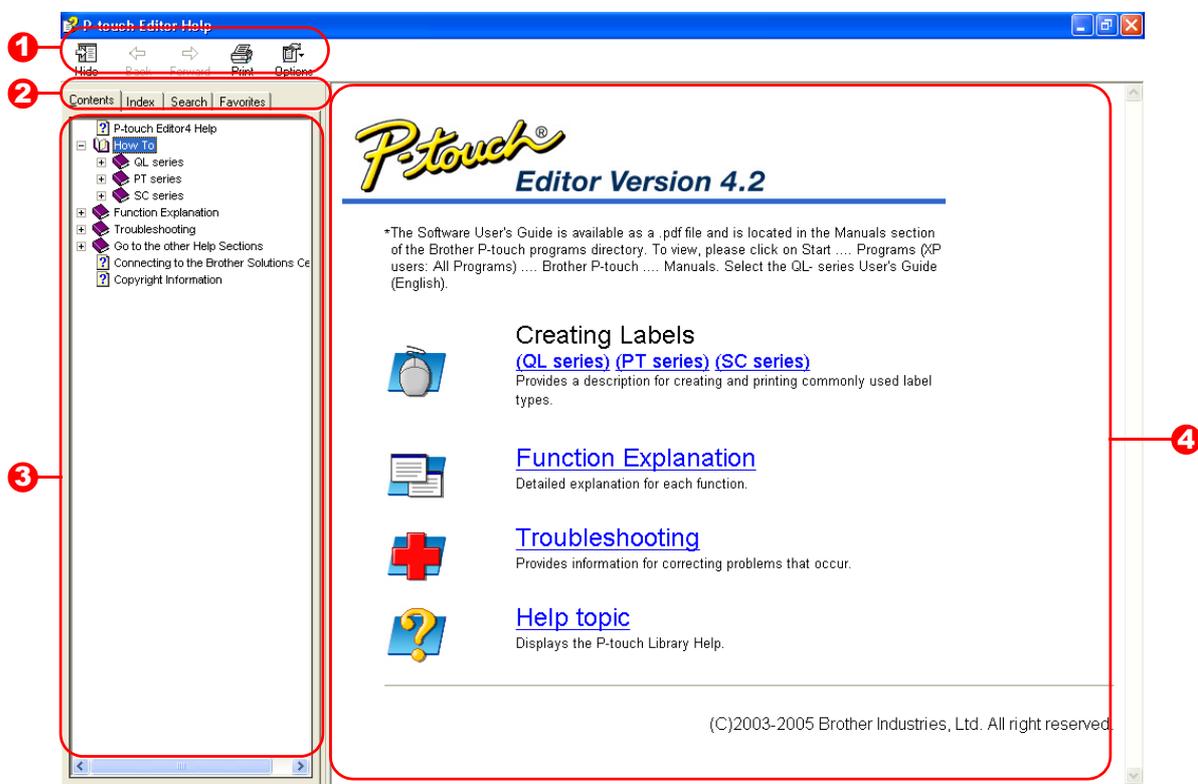

#### 1 Toolbar

A group of icons that allows quick and easy access to the Help.

#### 2 Tabs

Using four different ways ([Contents], [Index], [Search], and [Favourites]), you can search for information in the P-touch Editor Help.

#### 3 Menu

Displays the information for the tab you chose.

#### 4 Topic Area

Displays the description for the item you chose.

## ● Printing the Help description

The information given in P-touch Editor Help can be printed. Use your normal printer to print the P-touch Editor Help information.


**1** In the [Contents] tab, select any topic you want to print.

**2** Click  on the Toolbar.

The [Print Topics] dialog box appears.

**3** Select the range of topics to be printed, and click .

The [Print] dialog box appears.

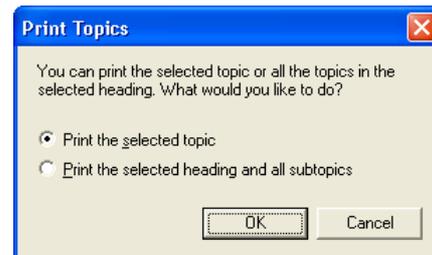

**4** Specify the [Printer] item and click .

The Help information is printed.



Select a normal printer that supports general paper sizes, such as A4.

## ► Creating Labels Efficiently

To create labels efficiently, you can use the Label List and Database functions of P-touch Editor. Since labels can be automatically created from a database or label log, you can create many labels quickly and easily if you specify the label layout beforehand.

The Label List function allows you to create a data log by directly entering text into the Label List window of the P-touch Editor. The log can also be edited (added, deleted, or modified). The list is saved together with the labels to allow you to use it again.

The database function is used to import information from an existing database created by another application.

For detailed information on the database function, refer to [►"Using external database files" on page 23.](#)



- The Label List can be exported only in the CSV format.
- Supported database file formats are: mdb (Microsoft® Access), xls (Microsoft® Excel), csv, and txt.
- To create labels using the Add-In function of P-touch Editor in other applications, refer to [►"Creating Labels with Other Applications" on page 26.](#)

## ● Using the Label List


Using the following example, this section describes the procedure for creating address labels by directly entering text into the Label List.

First, create a new layout by referring to [►"Creating an Address Label" on page 9](#) and choose the label size.

### Opening the Label List

#### 1 Click [File]-[Database]-[Label List].

The Label List/Database window appears.

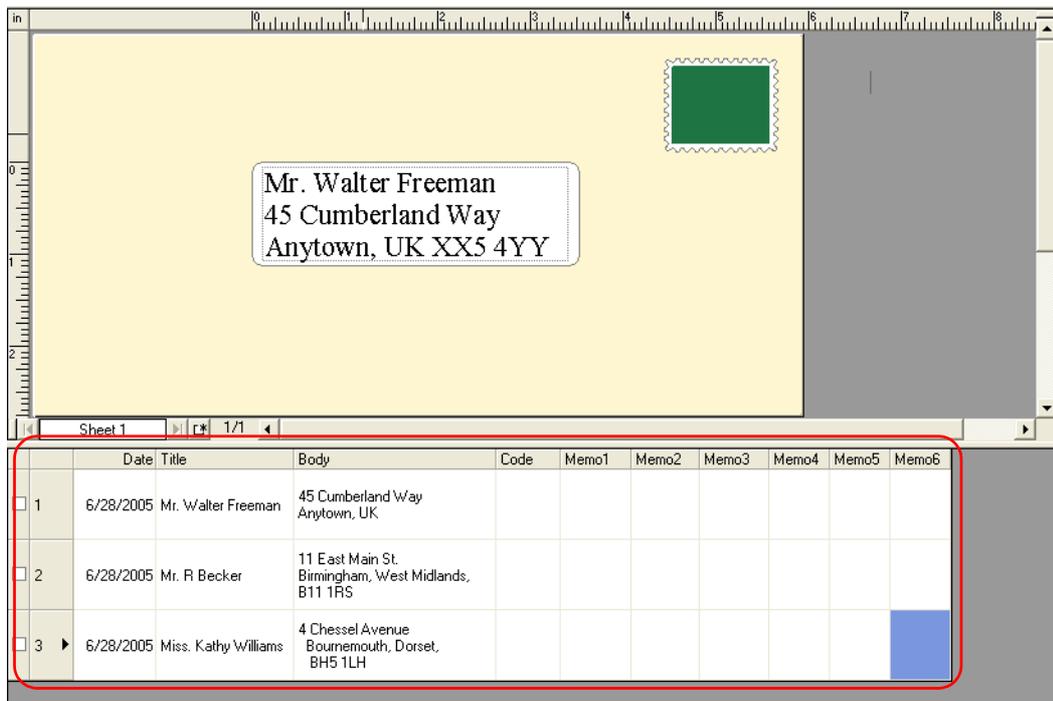

## Switching the Label List view

There are two ways to display the Label List/Database window: Record View and Form View. To change the view, right-click in the Label List/Database window, and select either Record View or Form View.

### ■ Record View

This view displays the list information.

	Date	Title	Body	Code	Memo1	Memo2	Memo3	Memo4	Memo5	Memo6
<input type="checkbox"/>	1	6/28/2005	Mr. Walter Freeman	45 Cumberland Way Anytown, UK						
<input type="checkbox"/>	2	6/28/2005	Mr. R Becker	11 East Main St. Birmingham, West Midlands, B11 1RS						
<input checked="" type="checkbox"/>	3	6/28/2005	Miss. Kathy Williams	4 Chessel Avenue Bournemouth, Dorset, BH5 1LH						

#### 1 Record selector

Clicking the record selector allows you to select a record.

The selected record is highlighted. The active record is indicated by a ► mark.

#### 2 Field selector

Displays the field names.

#### 3 Cell

Displays the field information for each field in a record.

#### 4 Record check mark

Records with a mark that can be printed.

Once fields are linked to a label layout, the corresponding data from the database automatically appears in the label when a record is selected.

To change what you see on the label, select another record.



- The font used in the record view can be changed by choosing a different setting in the [Database] tab in the [Options] dialog box. Click [Tool]-[Options] in the menu to open the [Options] dialog box. (If [Tool] is not displayed, click on the layout work area once.)
- The height of a record can be adjusted by dragging the record divider line in the record selector column. Similarly, the width of a field can be adjusted by dragging the field divider line in the field selector row.

### ■ Form View

Displays the data for the current record in a form.

Date(A):	7/7/2005
Title(B):	Mr. Walter Freeman
Body(C):	45 Cumberland Way Anytown, UK XX5 4YY
Code(D):	
Memo1(E):	
Memo2(F):	
Memo3(G):	
Memo4(H):	
Memo5(I):	
Memo6(J):	

#### 1 Field name

Displays the field names.

#### 2 Field data

Displays the field information for the record selected in the record selector.


## Entering data

In the following example, type an address and a name in the Body field.

### 1 Right-click in the Label List/Database window, and click [Create New Record].



You can also display the menu by right-clicking on the record selector.

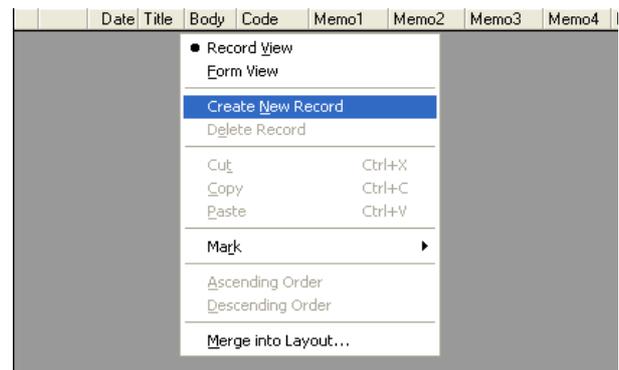

A new record is added to the list.

	Date	Title	Body	Code	Memo1	Memo2	Memo3	Memo4	Memo5	Memo6
<input type="checkbox"/> 1 ▶	6/28/2005									

### 2 Double-click in the [Body] field to place the cursor in the field, and type in the name and address.

	Date	Title	Body	Code	Memo1	Memo2	Memo3	Memo4	Memo5	Memo6
<input type="checkbox"/> 1 ▶	6/28/2005		Mr. Walter Freeman 45 Cumberland Way Anytown, UK							



- To enter a new line in a cell, hold down the [Ctrl] key and press the [Enter] key.
- The field name cannot be modified.

### 3 Repeat the above step to enter the data for all the fields you need.

### 4 To add another new record, right-click in the Label List/Database window and click [Create New Record].

	Date	Title	Body	Code	Memo1	Memo2	Memo3	Memo4	Memo5	Memo6
<input type="checkbox"/> 1 ▶	6/28/2005		Mr. Walter Freeman 45 Cumberland Way Anytown, UK							

A new record is added to the list.

	Date	Title	Body	Code	Memo1	Memo2	Memo3	Memo4	Memo5	Memo6
<input type="checkbox"/> 1	6/28/2005		Mr. Walter Freeman 45 Cumberland Way Anytown, UK							
<input type="checkbox"/> 2 ▶	6/28/2005									

### 5 Enter data, such as the name and address, for the new record.

### 6 To add more records, repeat Steps 4 and 5 above.

## Layout Styles

The Layout Style function allows you to create labels using Label List information in a simple way.

### ■What is a Layout Style?

- The Layout Style function lets you use a variety of saved label layouts easily.
- You can also save new layouts you have created, and later recall them quickly and easily.

### ■When is it useful to use a Layout Style?

- You can easily create labels by simply selecting a layout style and typing text in the P-touch Editor Layout window.
- With the Merge Fields function, you can quickly create and print labels by dropping data dragged from the Label List or a database.

### ■Changing the Layout Style for each DK Roll

A default layout style can be specified for each type of DK Roll.

Default layout styles have been preset. You may make changes to the default styles by following the procedure below:

- 1 Choose the DK Roll for the layout style you want to change, and insert it in the printer.**



- 2 Click [Format] -[Apply Layout Style].**




If [Format] is not displayed, click on the layout work area once.

The [Apply Layout Style] dialog box appears.




- The layout style that is currently the default is surrounded with a frame.
- If your desired layout style is not listed, create a new layout style.
- Refer to the following section "Using a Layout Style to create labels".

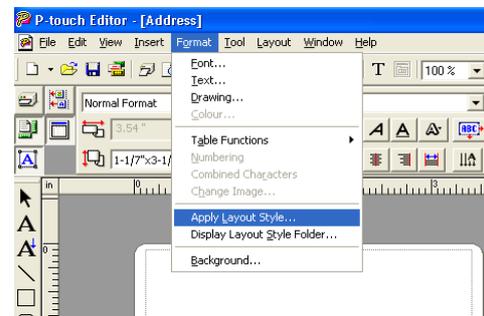

- 3 For the inserted DK Roll, click the layout style you want to use, and click .**

Now the default layout style for the DK Roll installed in the printer has been set.

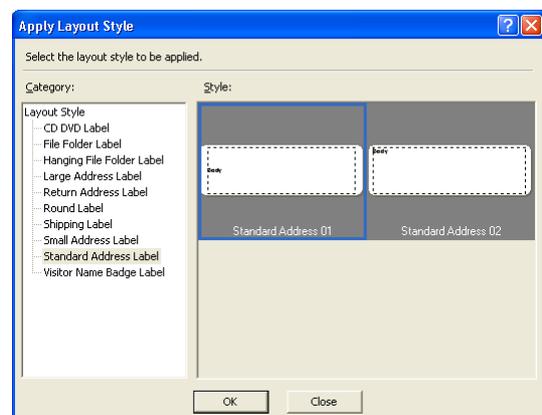

## ■ Using a Layout Style to create labels

### 1 With the Label List/Database window displayed, click [Format]-[Apply Layout Style].




If [Format] is not displayed, click on the layout work area once to display the layout menu.

The [Apply Layout Style] dialog box appears.


### 2 Select a layout suitable for the label you want to create, and click .



Every DK Roll has its own default layout. The layout style selected for that DK Roll is automatically saved as the default setting.

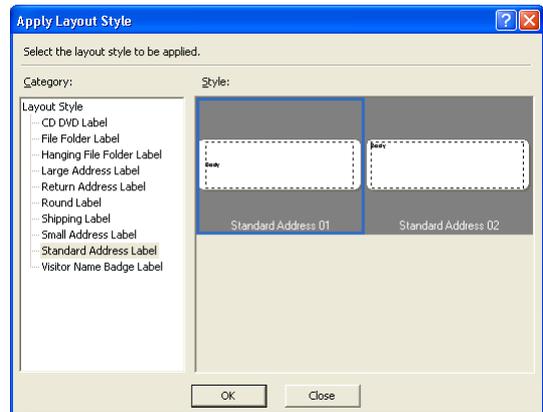

### 3 Return to the Layout window to check the labels.

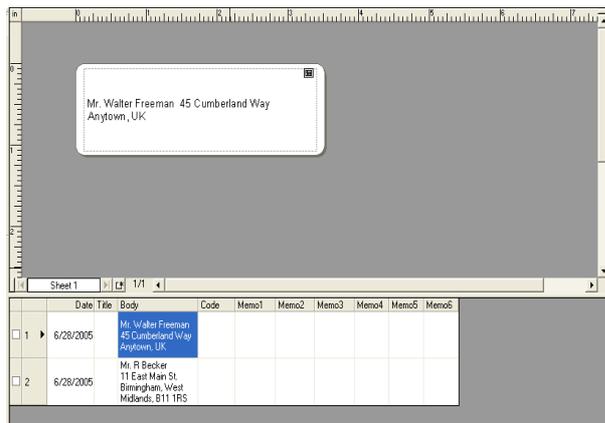

## ■ Creating and registering a new Layout Style

When there is no layout style appropriate for the label you want to create, you can create a new layout style. You can then save it as a new layout style for later use.


### 1 Click [File]-[New].

The [New] dialog box appears.

### 2 Click [New Layout], and click .



### 3 Create a text object and adjust its position or format.

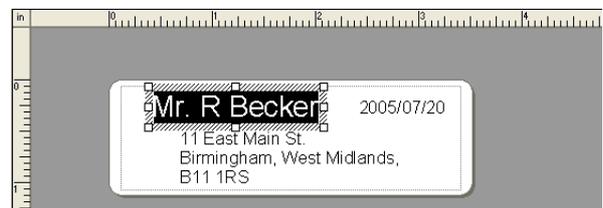


### 4 Right-click on the created text object and select [Properties] from the menu displayed.

The [Text Properties] dialog box appears.




The [Text Properties] dialog box also appears when you double-click the created text object.

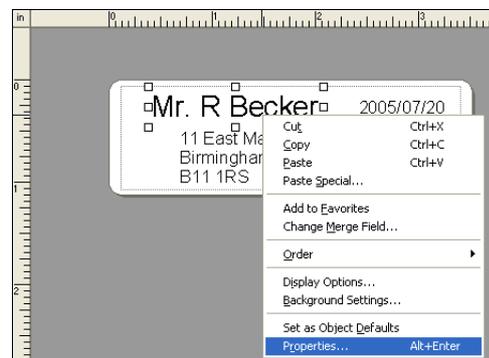

### 5 Click the [Expanded] tab and check the [Change Data in Layout Style Templates] check box.

Select [Label List] in [Target], select a field (such as [Title]) from [Merge Fields], and click .

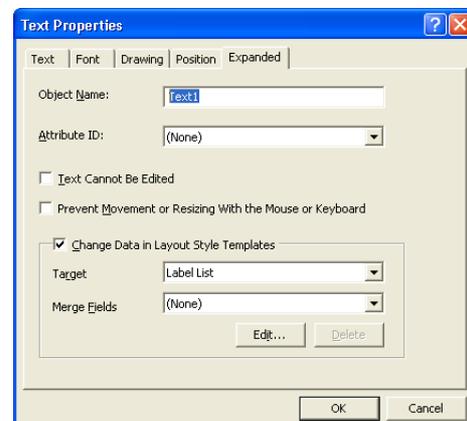


### 6 Repeat Steps 4 and 5 for every text object you have created.

## 7 Click [File]-[Save As].

The [Save As] dialog box appears.

## 8 Move to the folder in which you want to save the label layout.

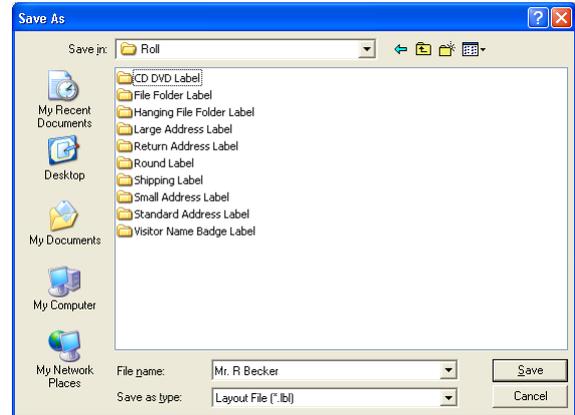


## 9 From the [Save As] type pull down, select [Layout Style Template].

Enter the [File name] and click .

The layout style you have created is now saved.

At this point, the new style has not yet been applied to the Label List information.

You need to apply the created layout style.

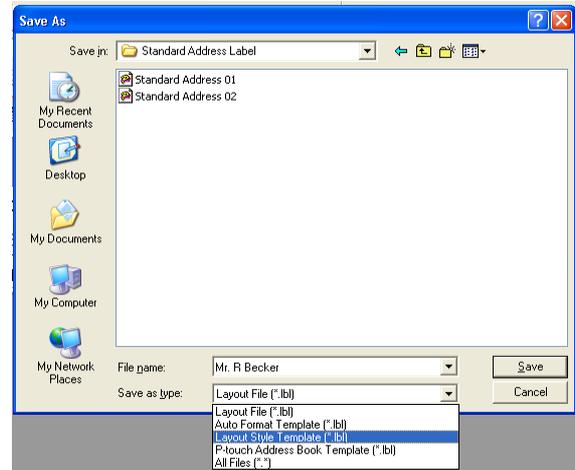

## 10 With the Label List/Database window displayed, click [Format]-[Apply Layout Style].




When [Format] is not displayed, click on the layout work area once to show the layout menu.

The [Apply Layout Style] dialog box appears.

## 11 Select the layout style you have created, and click .

The Label List information and layout are now updated.

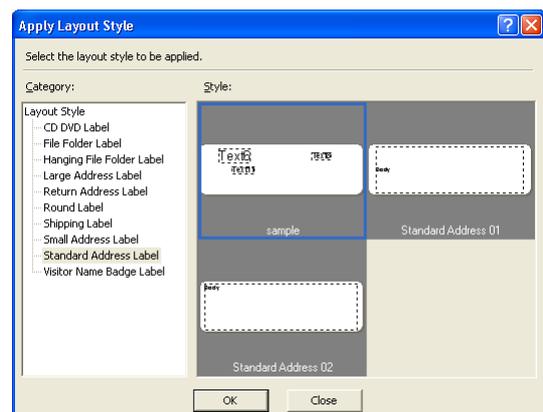


## Printing labels from the Label List

### 1 Click in the Print properties.

The [Print] dialog box appears.

### 2 Choose the Print Options.

Refer to →"Print Options and label cutting" on page 10.

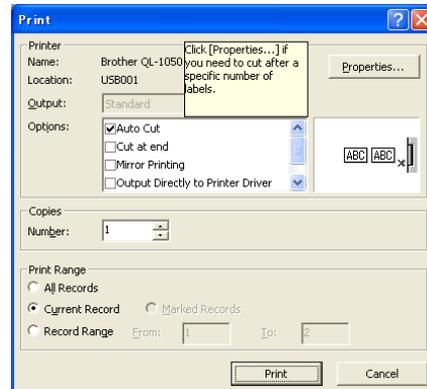

### 3 In [Print Range], specify the records to be printed.

Print Range setting	Details
All Records	Prints all records in the database or Label List.
Current Record	Prints the record currently displayed.
Marked Records	Prints the records marked in the database or Label List.
Record Range	Prints the records designated by the range specified in the From and To boxes.

### 4 Click .

The labels are printed.



- When you select any record in the database or Label List and click  on the standard toolbar, the selected record can be printed instantly.
- Selecting records while holding down the [Ctrl] key allows you to select multiple non-contiguous records.

## Using external database files


This section describes the procedure for creating barcode labels with a database. The following example uses a Microsoft® Excel file as a database.



The supported database file formats are: mdb (Microsoft® Access®), xls (Microsoft® Excel), csv, and txt.


### 1 Prepare a database file.

The following example uses a file (.xls) created with Microsoft® Excel, as shown on the right.

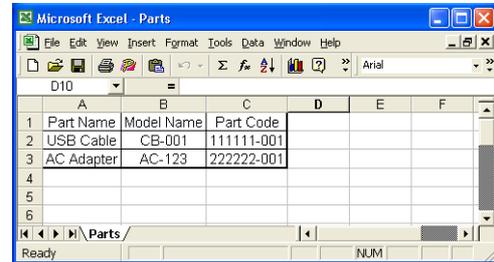

### 2 Start P-touch Editor and specify the label size.

In this example, specify [29mmx90mm] for the Tape Width box in the Page properties.

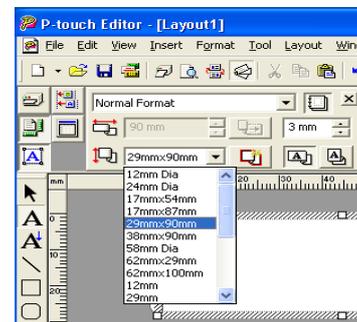

### 3 Click [File]-[Database]-[Connect].

The [Open Database] dialog box appears.




### 4 Select the Microsoft® Excel file you created and click .

The [Select Database Editing Mode] dialog box appears.




If the file you use has multiple sheets, the [Table Selection] dialog box appears. Select the sheet you want to use.

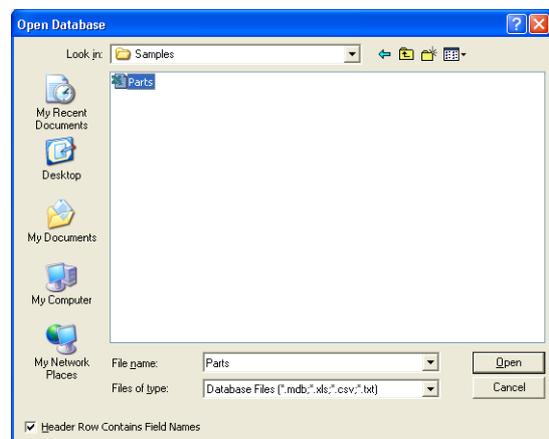

## 5 Specify how the file will be opened, and click .


The Database window appears.

- Connect as read-only (recommended for normal use).  
Used to print the original data.  
The data cannot be edited.
- Create a copy that can be edited (recommended if editing of data is required).  
Allows you to update the database. The original database will not be changed.
- Connect to original file and allow editing.  
If you choose this option, all macros, formulas and cell formats will be removed from your file.



## 6 Click [Part Name] (one of the field names in the Database window) to select it, and drag and drop it anywhere in the layout work area.

The pop-up menu appears.

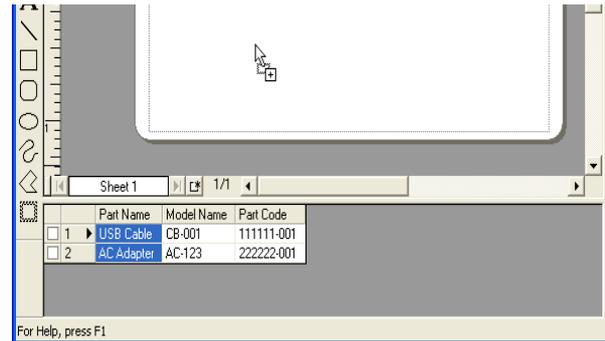


## 7 Click [Text].

The database content appears in the layout work area as text-based data.




Change the font, style and format of the text as needed.

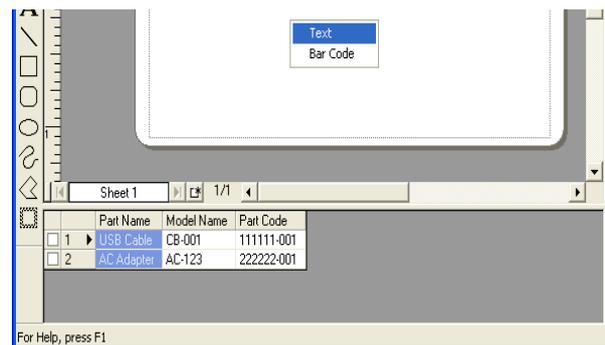

## 8 Repeat Steps 6 and 7 to display the [Model Name] data similarly.

## 9 Click [Part Code] (one of the field names in the Database window) to select it, and drag and drop it anywhere in the layout work area.

The pop-up menu appears.

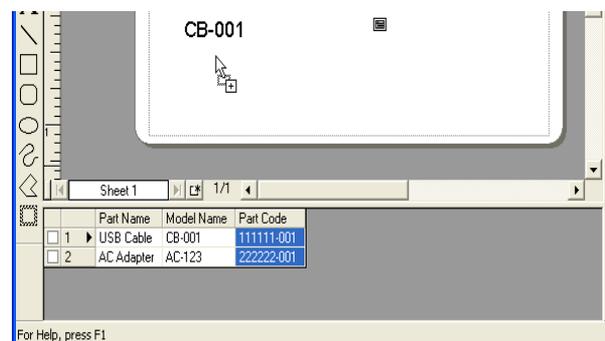


## 10 Select [Barcode].

The database content is merged into the layout work area as barcode data.



Change the format and settings of the barcode as needed by double clicking on the barcode to bring up the barcode properties window.

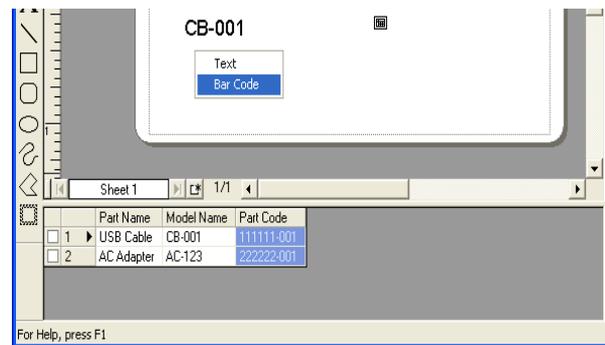


## 11 Click in the Print properties.


The [Print] dialog box appears.




If you want to print just the label shown in the layout work area, click  in the Print properties.

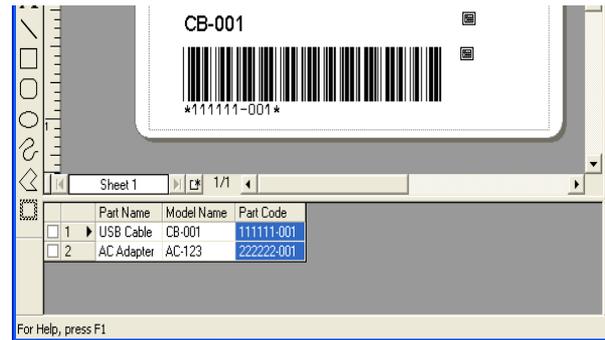

## 12 In [Print Range], select [All Records] and click .

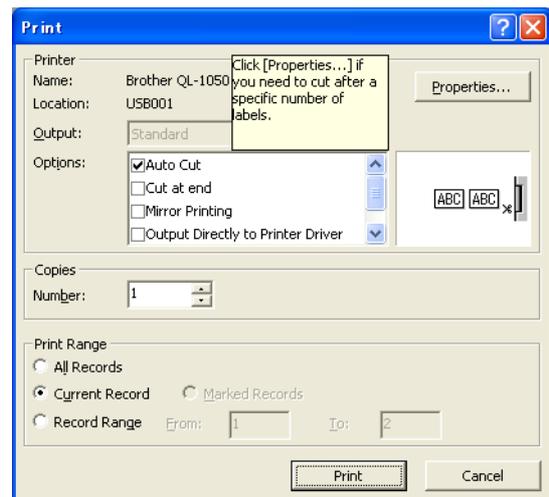

## 13 All the labels are printed, using the database information.

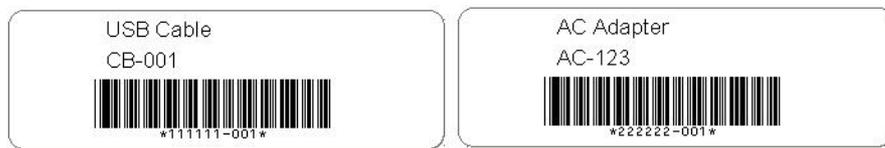

## ▶ Creating Labels with Other Applications

When installing the software, if you select the Add-In function, a P-touch icon will be automatically added onto the Microsoft® Word, Excel, and Outlook® toolbar. (Only if Microsoft® Word, Excel, Outlook® are already installed on your PC.)

In each application, by selecting the text you want to print and clicking on the P-touch icon, you can create and print labels quickly and easily.



- The Add-In function supports the following applications: Microsoft® Word 97/2000/2002/2003/2007, Microsoft® Excel 97/2000/2002/2003/2007, and Microsoft® Outlook® 2000/2002/2003/2007
- After the Add-In function is installed into Microsoft® Word, Excel, or Outlook®, the [Security Warning] dialog box may appear when starting these applications, depending on the application's security settings. If this dialog box appears, check the [Always trust macros from this source] checkbox, and click on [Enable Macros]. For details on security settings, refer to the Help files for the application.



## ● Add-In settings

To register or cancel the Add-In function, after the software installation, use the Add-In settings.

- 1 Click [Start]-[All Programs(Programs)]-[Brother P-touch]-[P-touch Tools]-[P-touch Editor 4.2 Add-Ins Utility].



The [Brother P-touch Add-In Settings] dialog box appears.


- 2 Click on the checkboxes for the applications in which the Add-In function is to be used, and turn off the checkboxes for the others.

[Apply] is used to specify what action is taken when the  (Add-In button) is pressed in each application.

- Add-In Preview : Displays the Add-In Preview.
- P-touch Editor : Starts P-touch Editor, enabling you to edit the text.
- Print Immediately : Prints the label.



Before running this program, close the Word, Excel and Outlook® programs.

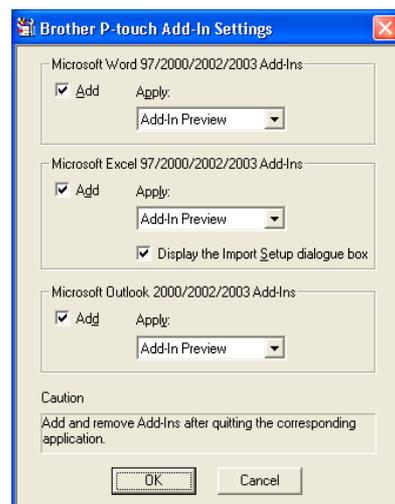


## ● Microsoft Word

With the Add-In function, you can directly copy the text selected in Microsoft® Word to a label layout.

### Creating labels using Microsoft Word


- 1 Open a Microsoft® Word document and select the text you want to print.

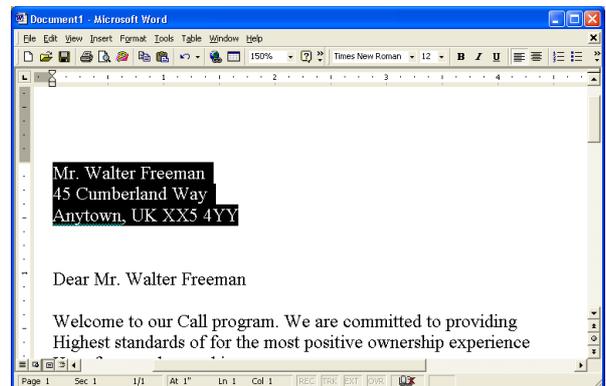

- 2 On the Microsoft® Word standard toolbar, click .

The Add-In Preview window appears.

In the Add-In Preview window, the imported text is displayed in the preset layout style.

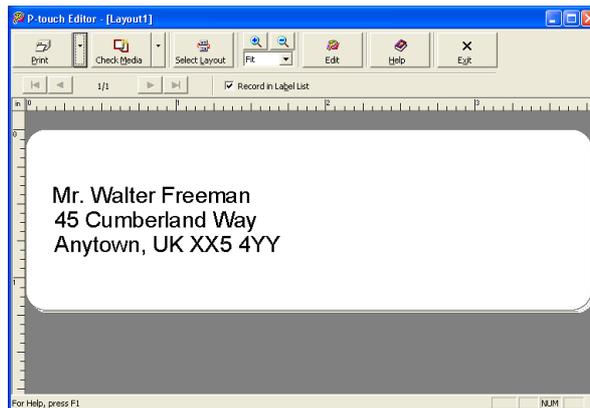

#### Toolbar in the Add-In Preview window

Icon	Button name	Function
	Print button	Prints labels.
	Print Settings button	Allows you to display the [Print] and [Printer Setup] dialog boxes using the menu displayed with a click on this button.
	Check Media button	Checks the size of the DK Roll installed in the printer.
	Paper Settings button	Used to select the paper.
	Select Layout button	The [Apply Layout Style] dialog box appears. Allows you to choose a different layout style.
	Zoom controls	Used to zoom in or zoom out on the label layout, or to select the magnification using the pull-down list.
	Edit button	Used to edit the currently displayed label with P-touch Editor.

Icon	Button name	Function
	Help button	Opens the P-touch Editor Help files.
	Exit button	Exits the Add-In Preview window.
	Record buttons	When multiple records are selected, displays the first record (  ) , previous record (  ) , next record (  ) , or last record (  ) . The figures between the buttons show the "current record number/total number of records".
	Record in Label check box	When this check box is turned on, the selected text is added to Label List.



- For details on how to automatically add the selected text to a Label List, refer to "How to add the Microsoft® Word text to a Label List" described below.
- If Microsoft® Outlook® is running and Microsoft® Word is selected as the standard editor, you won't be able to use the Add-In function in Microsoft® Word. Exit Microsoft® Outlook® and restart Microsoft® Word.

### 3 Click .

The labels are printed.



- If you want to edit or customize the text or label layout, click .
- This operation opens the P-touch Editor layout window, which allows you to edit labels.

## How to add Microsoft Word text to the Label List

If you want to register the text in the Label List, check the [Record In Label List] check box in the Add-In Preview window. New records are automatically created in the Label List and the selected text is added to each field shown below:

Selected text	Added field
Date of creation	Date field
The first line	Title field
All lines including the first line	Body field
Detected ZIP/Postal code	Code field


	Date	Title	Body	Code	Memo1	Memo2	Memo3	Memo4	Memo5	Memo6
<input type="checkbox"/> 1	6/28/2005		Mr. R Becker 11 East Main St. Birmingham, West Midlands, B11 1RS							
<input type="checkbox"/> 2 ▶	6/28/2005	Mr. Walter Freeman	Mr. Walter Freeman 45 Cumberland Way Anytown, UK.××5 4YY							

## ● Microsoft Excel

With the Add-In function, you can directly copy text selected in Microsoft® Excel to a label layout.

### Creating labels using Microsoft Excel

- 1 Open a Microsoft® Excel worksheet and select the cells that contain the text you want to include on the label.

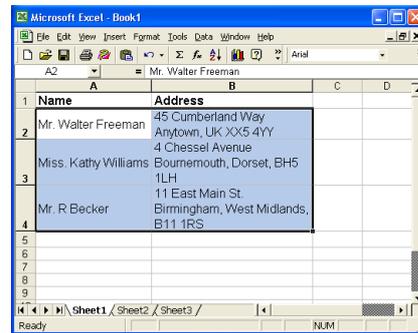


- 2 On the Microsoft® Excel standard toolbar, click . The [Brother P-touch Import Setup] dialog box appears.


- 3 In [Label Layout], make adjustments to the line feed in the cells and click .



[Label Layout] enables you to change the way your selected text is displayed/printed. When you select any listed item in the [Fields] box and click , a new field is added to the [Label Layout] box. You can enter spaces, line feeds, commas, and characters for each cell and print them on a label. You can also preview the layout in the [Label Preview] box.

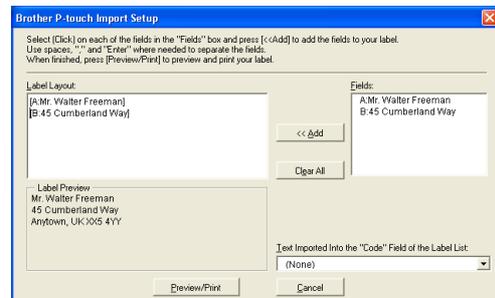

The Add-In Preview window appears.

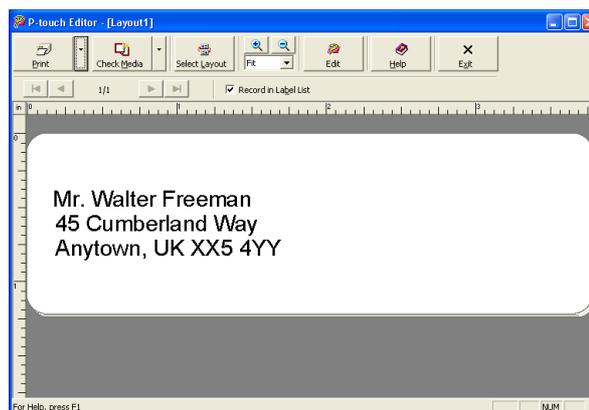

- For details on how to automatically add the selected text to a Label List, refer to "How to add Microsoft® Excel text to a Label List" described below.
- For details on the Toolbar of the Add-In Preview window, refer to → "Toolbar in the Add-In Preview window" on page 27.
- If you want to include the data into the Code field of the Label List, select [Text Imported Into the "Code" Field of the Label List] in the [Brother P-touch Import Setup] dialog box.
- When multiple records are selected in Excel, use the   buttons to show the other lines.

#### 4 Click .

The labels are printed.



To edit or customize the text or label layout, click . This operation opens the P-touch Editor layout window, which allows you to edit labels.

### How to add the Microsoft Excel text to the Label List

If you want to register the text in the Label List, check the [Record In Label List] check box in the Add-In Preview window. New records are automatically created and the selected text is added to each field as shown below:

Selected text	Added field
Date of creation	Date field
The first line in the text that is specified in the Label Layout	Title field
All lines including the first line in text specified in the Label Layout	Body field
Content of cell specified in [Text Imported Into the "code" Field of the Label List]	Code field

		Date	Title	Body	Code	Memo1	Memo2	Memo3	Memo4	Memo5	Memo6
<input type="checkbox"/>	1	6/28/2005	Mr. Walter Freeman	Mr. Walter Freeman 45 Cumberland Way Anytown, UK XX5 4YY							
<input type="checkbox"/>	2	6/28/2005	Miss. Kathy Williams	Miss. Kathy Williams 4 Chessel Avenue Bournemouth, Dorset, BH5 1LH							
<input type="checkbox"/>	3	6/28/2005	Mr. R Becker	Mr. R Becker 11 East Main St. Birmingham, West Midlands, B11 1RS							

## ● Microsoft Outlook



With the Add-In function, you can directly copy the text selected in Microsoft® Outlook® to a label layout. Items you can import are: Contacts, Calendar items, Deleted Items, Drafts, Inbox, Journal, Notes (text in the Notes dialog box is not available), Outbox, Sent Items and Tasks windows.

### Creating labels using the Contacts data in Microsoft Outlook

#### 1 Open Microsoft® Outlook® Contacts and select the Contact information you want to include.




In Microsoft® Outlook®, you can include not only the Contact data but also the text in a message, as you can do in Microsoft® Word.

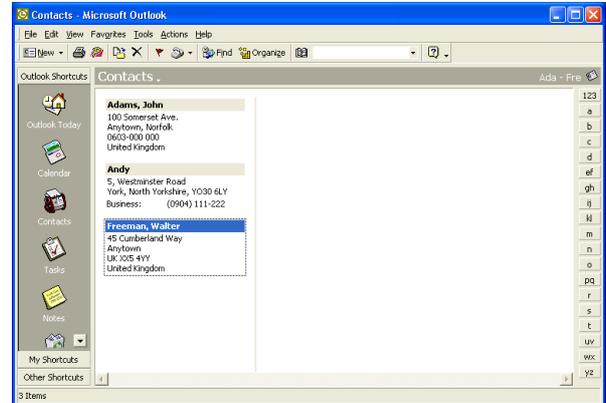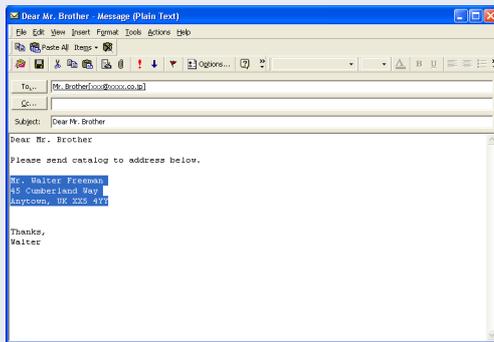

#### 2 On the Microsoft® Outlook® standard toolbar, click .

The Add-In Preview window appears.

In the Add-In Preview window, the selected text is displayed in the preset layout style.

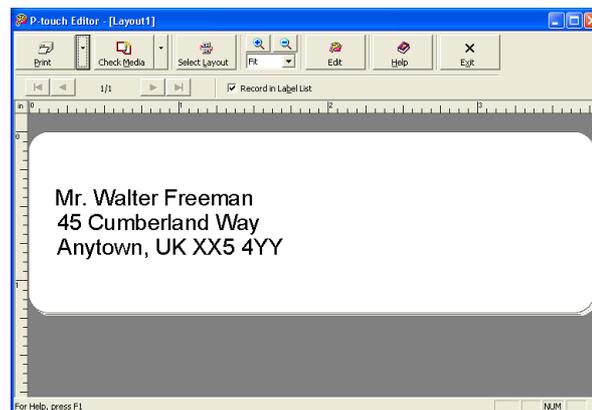

- For details on how to automatically add the selected text to the Label List, refer to "How to add the Microsoft® Outlook® text to a Label List" described below.
- For details on the Toolbar of the Add-In Preview window, refer to → "Toolbar in the Add-In Preview window" on page 27.

#### 3 Click .

The labels are printed.



To edit or customize the text or label layout, click .

This operation opens the P-touch Editor layout window, which allows you to edit labels.

## How to add the Microsoft Outlook text to a Label List

If you want to register the text in the Label List, check the [Record In Label List] check box in the Add-In Preview window. New records are automatically created in the Label List and the selected text is added to each field as shown below:

### ■When importing data from the Contacts window:

Name of Contact item	Added field
Date of creation	Date field
Contact Full Name	Title field
Contact Full Name and Contact Address when the [This is the mailing address] check box is selected	Body field
Contact Company and Job Title when the contact's address is "Business"	Body field
Contact ZIP/Postal code	Code field

		Date	Title	Body	Code	Memo1	Memo2	Memo3	Memo4	Memo5	Memo6
<input type="checkbox"/>	1	▶	6/28/2005	Mr. Walter Freeman	Mr. Walter Freeman 45 Cumberland Way Anytown, UK XX5 4YY	XX5 4YY					

### ■When importing information other than Contact information:

Selected text	Added field
Date of creation	Date field
The first line	Title field
All lines including the first line	Body field

		Date	Title	Body	Code	Memo1	Memo2	Memo3	Memo4	Memo5	Memo6
<input type="checkbox"/>	1	▶	6/28/2005	Mr. Walter Freeman	Mr. Walter Freeman 45 Cumberland Way Anytown, UK XX5 4YY						



It is not possible to start several instances of P-touch editor by using the P-touch Add-In function.

# How to Use the P-touch Address Book

This section describes the procedure for creating labels from contacts efficiently using the P-touch Address Book.

## ▶ Starting the P-touch Address Book

### 1 Click [Start]-[All Programs(Programs)]-[Brother P-touch]-[P-touch Address Book 1.0] .



You can also start the P-touch Address Book using the following methods: (Only if you created the shortcut during installation)

- Double-click the shortcut icon on the desktop.
- Click the shortcut icon on the Quick Launch bar.




When the P-touch Address Book is launched, the [Startup] dialog box appears, letting you make settings to create new contacts, import CSV format data or Outlook® contacts, and so on.

### 2 In the [Startup] dialog box, specify how the P-touch Address Book works and click .

The layout window appears.


- When [Create a New Contact] is selected, the layout window appears.
- When [Import Contacts from a CSV File] or [Import Contacts from Outlook] is selected, you can import contacts in other formats. Refer to →"Importing Contact Data" on page 36.
- Click  to open the P-touch Address Book Help files.

The P-touch Address Book Help offers detailed information on available features and explains how to use the P-touch Address Book.

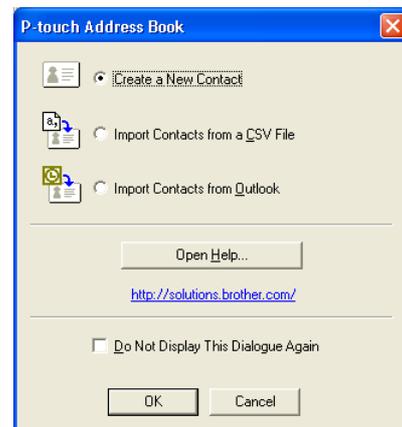

## Layout window

The layout window consists of the following eight sections:

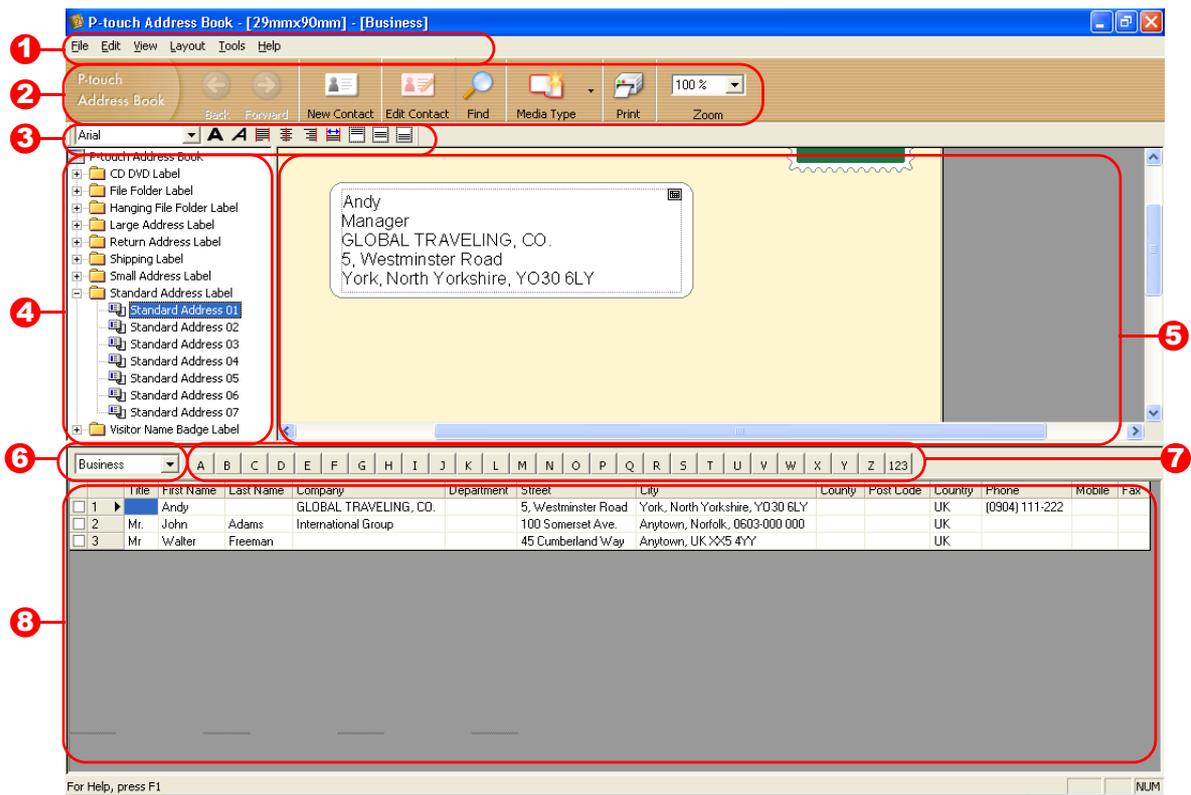

### 1 Menu bar

Commands are categorized under each menu (File, Edit, View, and Insert) by function.

### 2 Standard toolbar

A group of frequently used commands (such as New Contact, Edit Contact, Find, Print, etc.) are provided in this toolbar.

### 3 Text toolbar

Used to adjust text attributes such as font size and alignment.

### 4 Layout style selection view

Displays layout styles stored in the folder you selected.

### 5 Layout work area

This area is used to display or edit a layout that uses the layout style selected in the layout style selection view.

### 6 Contact list combo box

Displays the contact list that is currently specified. You can choose from [Personal], [Business], [Other1], [Other2] and [Other3].

### 7 Index tab

You can search within the field selected in Record View. Click [Tool]-[Sort] to open the [Sort] dialog box, and specify the field to be searched using [Key1].

### 8 Record View


The Contact data is displayed in each field. The data can also be edited (added to, deleted or modified).

# ▶ Creating a New Contact

This section explains how to create a new contact.

- 1 Click [File]-[New Contact]. Or, click .**  
The [New Contact] dialog box appears.

- 2 Enter data for each item.**

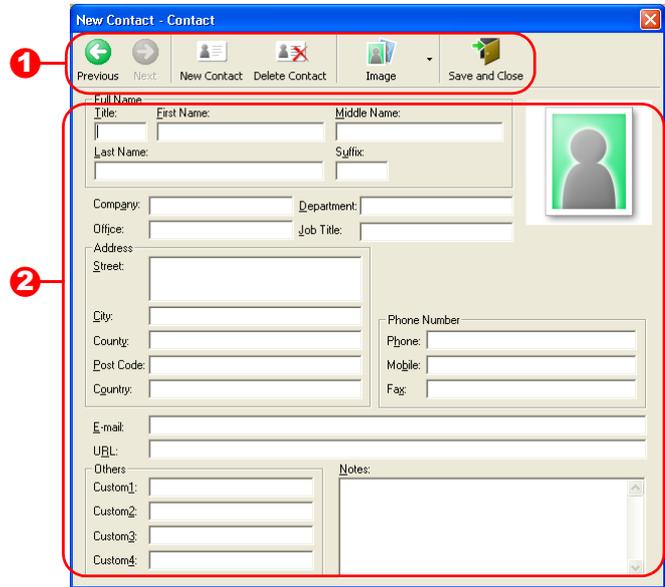

- 1 New Contact form toolbar**

The following commands are categorized in the menu:

Icon	Button name	Function
	Previous	Displays the previous contact.
	Next	Displays the next contact.
	New Contact	Displays the New Contact form window for a new contact.
	Delete Contact	Deletes the contact that is currently selected.
	Image	Allows you to insert an image for a contact from a file or a camera currently connected to the PC. The following file types are supported: <ul style="list-style-type: none"> <li>• Bitmap (*.bmp, *.dib)</li> <li>• JPEG file (*.jpg, *.jpeg)</li> <li>• TIFF file (uncompressed) (*.tif)</li> <li>• GIF file (*.gif)</li> <li>• Icon (*.ico)</li> <li>• Windows Meta File (*.wmf, *.emf) (*Image adjustment is not allowed.)</li> <li>• PNG file (*.png)</li> </ul>
	Save and Close	Saves the contact and closes the [New Contact] dialog box.

- 2 Contact form**

Used to enter each item such as name, address, phone number, company information, and E-mail address for the new contact.

- 3 Click .**


# ▶ Importing Contact Data

CSV format files and Outlook® Contact data can be imported and used in P-touch Address Book contacts.

## ● Importing contact data in CSV format

### 1 Click [File]-[Import]-[CSV File].


The [Open] dialog box appears.



### 2 Select a file to be imported and click

.

The [Stop Signal Replacement] dialog box appears.

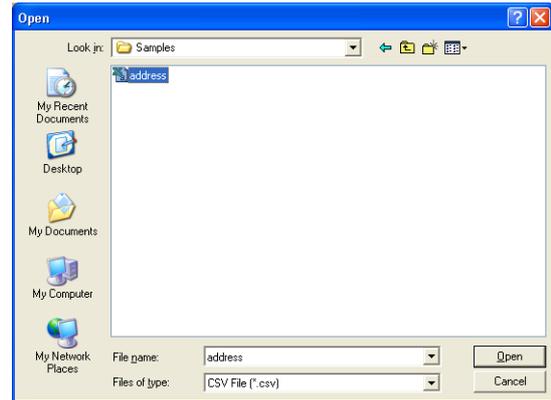


### 3 Select the correct [Original File Conversion Stop signal] for your file, and click .



When the [Make Field Name the First] is checked, the first line shows the field names.


The [Fields to Import] dialog box appears.



### 4 Assign [CSV/Outlook Fields] to [Address Book Fields] and click .



Every CSV file field is imported, even if the same field is not included in the Address Book contact.

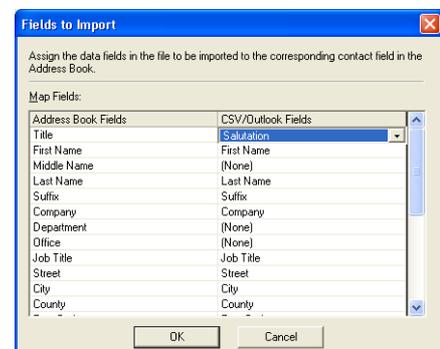


The Contact data is displayed in Record View.

	Title	First Name	Last Name	Company	Department	Street	City	County	Post Code	Country	Phone	Mobile	Fax
<input type="checkbox"/> 1		Andy		GLOBAL TRAVELING, CO.		5, Westminster Road	York, North Yorkshire, YO30 6LY			UK	(0904) 111-222		
<input type="checkbox"/> 2	Mr.	John	Adams	International Group		100 Somerset Ave.	Anytown, Norfolk, 0603-000 000			UK			
<input type="checkbox"/> 3	Mr.	Walter	Freeman			45 Cumberland Way	Anytown, UK XX5 4YY			UK			

## ● Importing Outlook contact data

### 1 Click [File]-[Import]-[Outlook Contacts].


The [Fields to Import] dialog box appears.



### 2 Assign [CSV/Outlook Fields] to [Address Book Fields] and click .



Every Outlook® Contacts field is imported, even if the same field is not included in the Address Book contact.

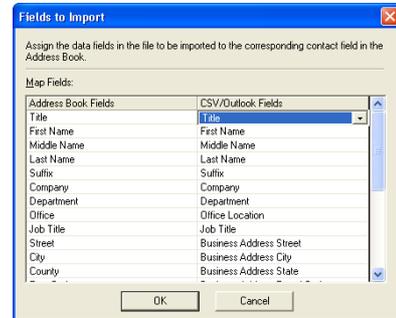

The Contact data is displayed in Record View.

	Title	First Name	Last Name	Company	Department	Street	City	County	Post Code	Country	Phone	Mobile	Fax
<input type="checkbox"/>	1	▶	Andy		GLOBAL TRAVELING, CD.	5, Westminster Road	York, North Yorkshire, YO30 6LY			UK	(0904) 111-222		
<input type="checkbox"/>	2	Mr.	John	Adams	International Group	100 Somerset Ave.	Anytown, Norfolk, 0603-000 000			UK			
<input type="checkbox"/>	3	Mr.	Walter	Freeman		45 Cumberland Way	Anytown, UK XX5 4YY			UK			

## ▶ Editing the Contact Data

This section explains how to edit the contact data.

### 1 Click [File]-[Edit Contact]. Or, click .

The [Edit Contact] dialog box appears.

### 2 Edit the data in each item.



For details on the Toolbar of the New Contact form, refer to → "Creating a New Contact" on page 35.

### 3 Click .

# ▶ Printing the Label

This section explains how to print a created label.

## 1 Click .


The labels are printed.

## 2 Cut off the printed label using the Cut button or the Cut lever (Brother QL-500) on the front of the printer.



In the [Print] dialog box, if [Auto Cut] is checked in [Options], the printed labels will automatically be cut (Not available for QL-500).

Mr. Walter Freeman  
45 Cumberland Way  
Anytown, UK XX5 4YY




### Print Options and label cutting

Clicking [File]-[Print] will open the [Print] dialog box. This dialog box allows you to set the print options and the number of copies.



You can set the number of labels between cuts with the Option tab in the Print dialog box displayed when you click the Properties button. (QL-560/1050/1050N only)

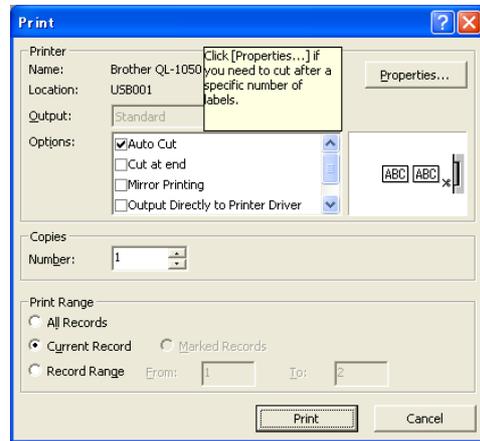

Settings		Details
Options	Auto Cut (QL-560/650TD/ 1050/1050N)	When this check box is checked, labels will automatically be cut. When this check box is not checked, labels won't automatically be cut after printing. Press the Cut button in the printer to cut them, as needed.
	Cut at end (QL-560/650TD/ 1050/1050N)	When multiple labels are printed, it only cuts after the final label is printed.
	Mirror Printing	Prints a mirror image of the label. Use this option to create labels that can be applied to the inner surface of glass, etc. Use clear tape when creating such labels.
	Output Directly to Printer Driver	Check this check box for normal use.
Copies	Number	Used to specify the number of copies to be printed.
Print Range	All Records	Prints all contacts shown in the Record View.
	Current Contact	Prints the contact that is currently displayed.
	Marked Contacts	Prints the contacts marked in the Record View. Check the check box at the left end of the field to mark the contact.
	Contact Range	Prints the contacts designated by the range specified in the From and To boxes.

# How to Use P-touch Transfer Manager & P-touch Library

The P-touch Transfer Manager is basically for the QL-650TD. The QL-1050 can also transfer templates, but it cannot select templates with machine side operation. So using the ESC/P command you can use transfer templates.


**P-touch Library:** This application allows you to manage P-touch label templates and other data on the PC. You can print a label from the P-touch Library using the printer.

**P-touch Transfer Manager:** This application can transfer label template data and other data managed with the P-touch Library to the printer's main unit and can make backups of data transferred to the printer's main unit.

## ▶ Starting up P-touch Transfer Manager


- 1 Click the [Start] button, then select [All programs (Programs)] - [Brother P-touch] - [P-touch Tools] - [P-touch Transfer Manager 2.0].  
P-touch Transfer Manager starts up.

### Layout window

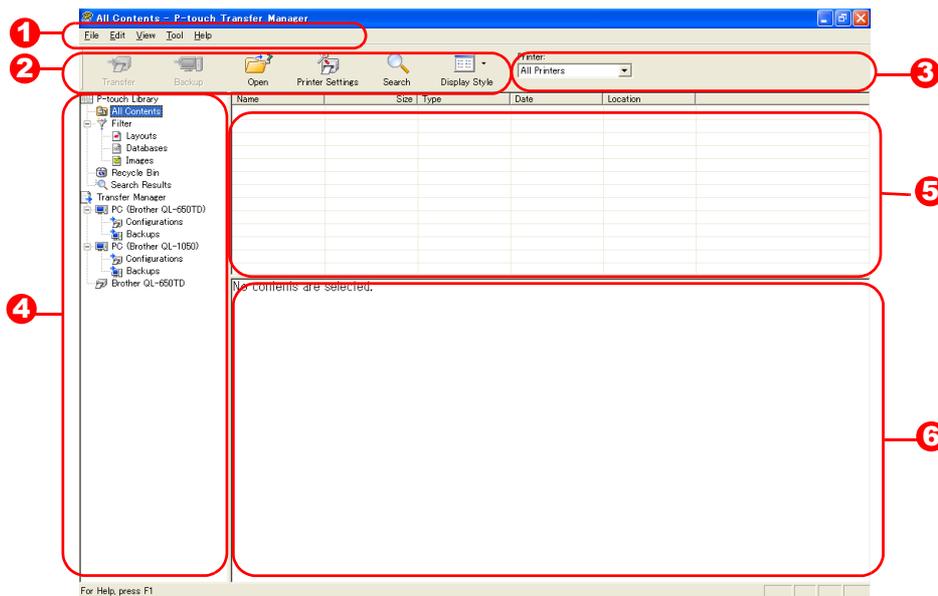


- 1 **Menu**  
Commands are categorized into each menu (File, Edit, View, Tool, and Help) by function.
- 2 **Toolbar**  
There are icons for frequently used commands. Click on one to execute its command.
- 3 **Selecting the printer model (Only for P-touch Transfer Manager)**  
Select the printer model to send data to. When you select a printer, only the data that can be sent to the selected printer is displayed in the list view.
- 4 **Folder view**  
Displays a list of folders. When you select any folder, the data in the folder selected is displayed in the list view on the right.
- 5 **List view**  
The data in the selected folder is displayed.
- 6 **Preview**  
The label templates selected in the list view are displayed as a preview.

## ● Explanations of the Icons

Icon	Button name	Function
	Transfer (Only for P-touch Transfer Manager)	Transfers the label templates and other data on your PC to the printer.
	Backup (Only for P-touch Transfer Manager)	Backs up the data you have transferred to the Brother P-touch printer using the P-touch Transfer Manager.
	Open	Edits the selected data.
	Print (Only for P-touch Library)	Prints the selected label template with the printer.
	Printer Settings (Only for P-touch Transfer Manager)	Makes the settings related to the printer.
	Search	Searches the data managed with the P-touch Library.
	Display Style	Changes the file display format.

## ● Folder view

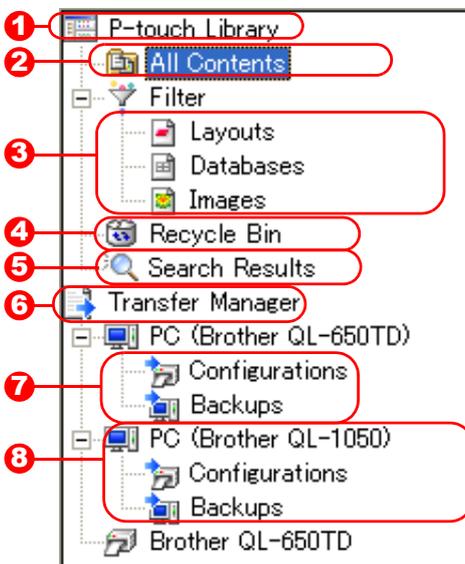


- 1** P-touch Library  
Manages P-touch label templates, Bitmap format images, and CSV data etc.
- 2** All Contents  
Displays the data managed with the P-touch Library. You can also make new folders for organizing the data.
- 3** Filter  
Displays all the data currently managed with the P-touch Library in a type-by-type list.
- 4** Recycle Bin  
Data deleted from the P-touch Library is moved here.
- 5** Search Results  
The search results are displayed.
- 6** Transfer Manager  
Transfers PC data to the printer. This is only displayed when P-touch Transfer Manager is started.
- 7** Configurations  
Data transferred to the PC is saved here. You can make new folders for organizing the data.
- 8** Backups  
Saves data backed up from the printer.

# ▶ Transferring label templates from the PC to the printer

## 1 Select the printer to transfer data to.




Before transferring data, check that the PC and the printer are correctly connected with a USB cable and that the printer power is On.

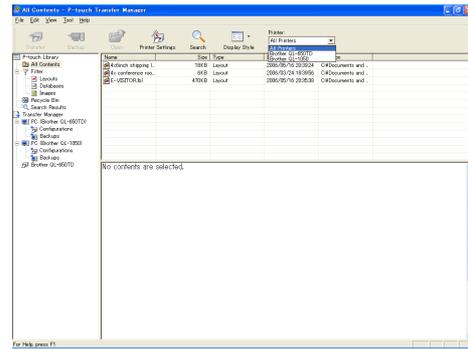

## 2 Right click the [configurations] folder, then select [New] and create a new folder.

Here, as an example, we create the folder "Transfer".

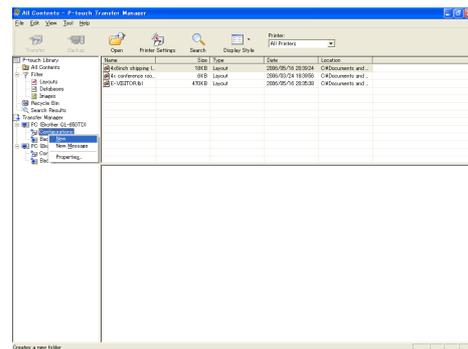


## 3 Drag the transfer data to the folder you just made.

Drag the transfer data from All contents or from Layouts or some other folder under Filter. When transferring multiple sets of data, move all the transfer data to the folder you made.



The data that can be transferred depends on your printer model. For details, refer to your printer's manual.

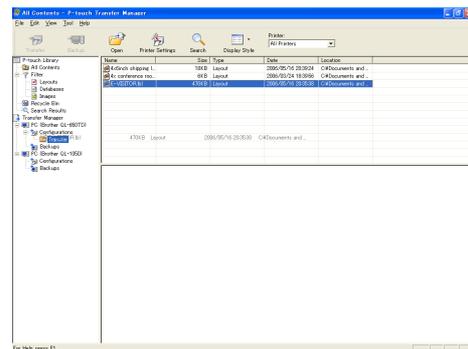


## 4 Key Assign numbers are automatically assigned to transfer data within the folder you made in the previous step.

To change a number, right click the data name in the list view, then select key assign number.




- Key Assign is necessary for transfer of data other than message texts.
- If you change the Key Assign number used for data already transferred to the printer's main unit, it is overwritten. You can check the Key Assign number used for data already transferred to the printer by backing up the data as explained in "Backing up label templates" (Page 44).
- You can click the data name for transfer data and change to a new name. Depending on your printer model, there may be restrictions on the number of characters that can be used in a data name.

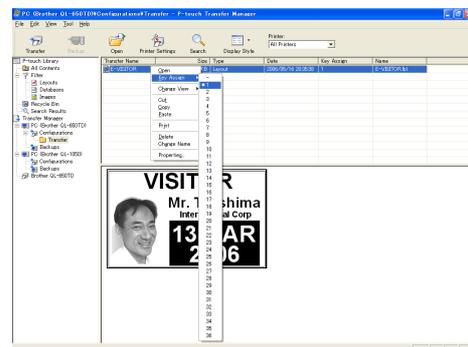

## 5 Select the data or folder you want to

transfer, then click  .

The transfer confirmation message is displayed.

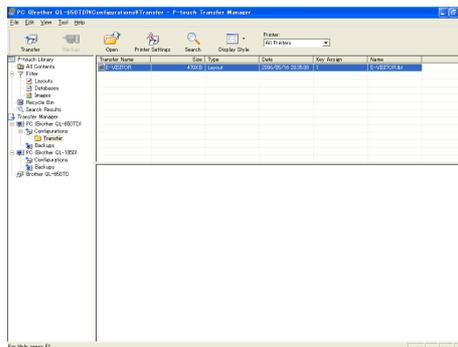

## 6 Click [Yes].

The selected data or folder is transferred to the printer.




If you have selected specific data in the list view, only that selected data is transferred to the printer.




# ● Creating and transferring a new message (QL-650TD only)

**1** Select the QL-650TD Configurations folder or any folder under it.

**2** Right click, then select [New Message].  
[Message] dialog box is displayed.

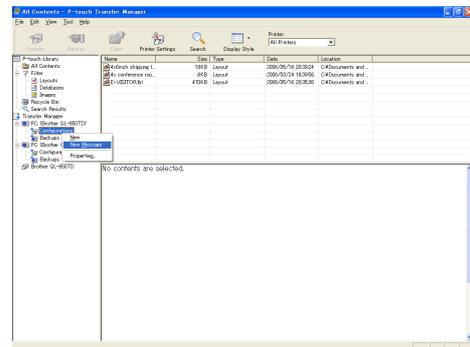

**3** Select the number for the message to create or edit.

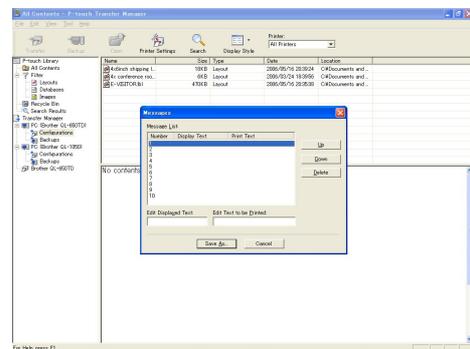


**4** Input the display text and print text, then click [Save As].

A screen is displayed for specifying where to save the message file in the PC. Change storage location or revise the message file name as necessary.



A maximum of 10 messages can be stored in the message file. Only 1 message file can be sent to 1 unit of QL-650TD, so to correct a message, double-click on the existing message file to open the [Messages] dialog box and make the correction.

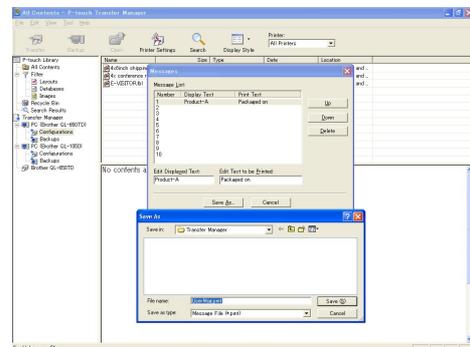


**5** Select the message text or its folder you

want to transfer, then click .


The transfer confirmation message is displayed.



Before transferring a message, check that the PC and the printer are correctly connected with a USB cable and that the printer power is On.

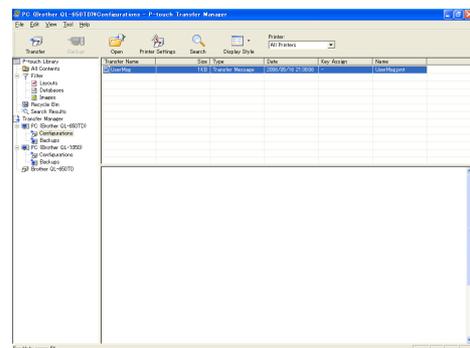

**6** Click [Yes].  
The message data is transferred to the printer.



## ▶ Backing up label templates

This transfers label templates and other data in the printer to the PC.



- Backed up data cannot be edited on the PC.
- For some printer model specifications, it may not be possible to retransfer backed-up data to a printer of a different model than the one the data was originally backed up from.

### 1 Connect the PC and the printer by cable and switch on the printer power.


The printer model name is displayed in the folder view.

If you select a printer model name in folder view, the current data transferred to the computer is displayed.

### 2 Select the printer to back up from, then


click  .

The backup confirmation message is displayed.

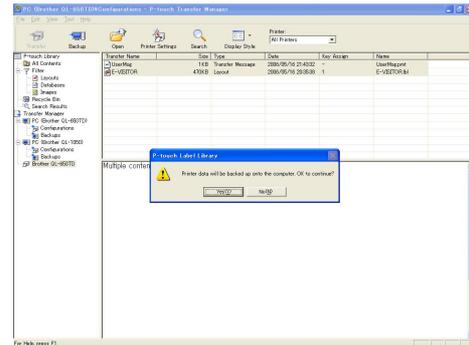

### 3 Click [Yes].

New folder with a name containing the date is created under printer folder, and all the printer's data is transferred to that new folder.

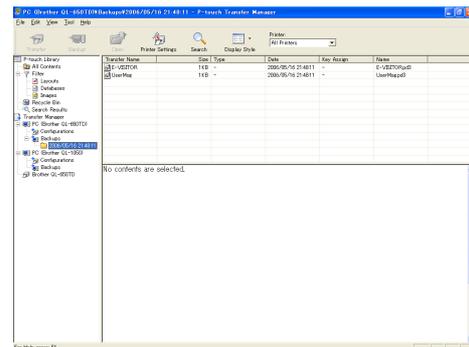


## ● Deleting all the printer data

### 1 Connect the PC and the printer by cable and switch on the printer power.

The printer model name is displayed in the folder view.


### 2 Right click the printer, then select [All Delete].

The confirmation message is displayed.

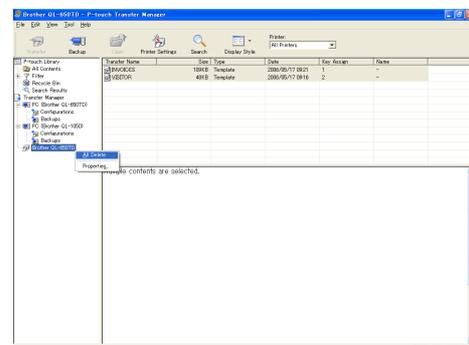

### 3 Click [Yes].


All data in the printer is erased.

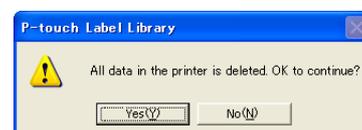

# ▶ Changing printer settings from the PC

- 1 Connect the PC and the printer by cable and switch on the printer power.**  
The printer model name is displayed in the folder view.

- 2 Select the printer, then click  .**  
The [Printer Settings] dialog box is displayed.

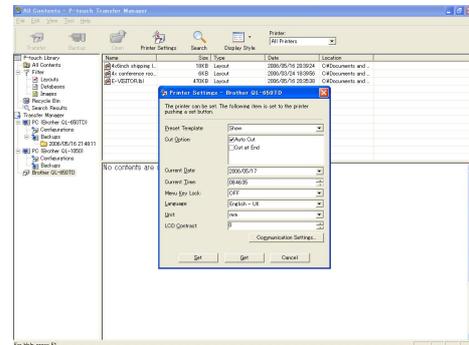

- 3 Change settings as necessary.**  
The items that can be set depend on the printer model.

Settings	Details
Preset Template	Sets whether or not to display templates preset in the printer.
Cut Option	Sets options for cutting labels.
Current Date/Current Time	Transfers the PC's date and time or any date and time you want to the printer to set its date and time. You can also select the date and time format.
Menu Key Lock	Locks the menu keys.
Language	Sets the language displayed on the LCD display.
Unit	Selects the unit (inch/mm) used for display on the LCD.
LCD Contrast	Sets the contrast of the LCD display.

- 4 Click [Set].**  
The setting is reflected on the printer.



When you click [Get], the current printer settings are read in and displayed in the dialog box.

## ▶ Starting up the P-touch Library

You can start up the P-touch Library and edit and print labels.



You cannot transfer data or back up data from the printer by using the P-touch Library. To transfer or back up data, select the View menu [Mode] - [Transfer Manager] to switch to the P-touch Transfer Manager.

- 1 Click the [Start] button, then select [All programs (Programs)] - [Brother P-touch] - [P-touch Tools] - [P-touch Library 2.0].  
The P-touch Library starts up.

## ● Opening and editing data


- 1 Select the data you want to edit, then click



The application associated with the data is opened and you can edit the data.



The application that starts up depends on the data. For example, for a P-touch template, P-touch Editor starts up.

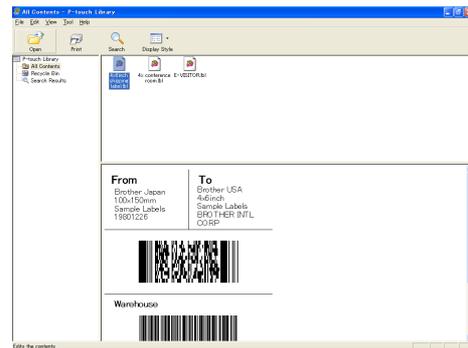


## ● Printing labels

- 1 Select the label templates you want to print,

then click



The label is printed by the connected printer.

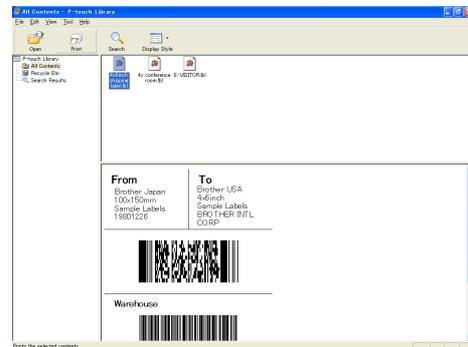


# ▶ Searching labels

You can search label templates registered in the P-touch Library.



The [Search] dialog box is displayed.

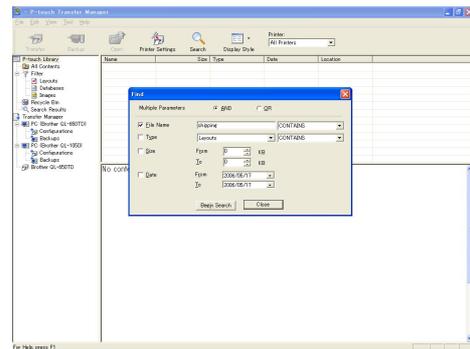


## 2 Check the items to be used as search conditions and set the search items.

The search items that can be set are as follows.

Settings	Details
Multiple Parameters	This sets the method for combining multiple search items. If you select AND, files are searched for that satisfy all the conditions. If you select OR, files are searched for that satisfy any one of the conditions.
Name	Inputs the data name to search for.
Type	Selects the data type to search for.
Size	Sets the data size to search for.
Date	Sets the date and time at which the data to search for was last modified.

## 3 Click [Begin Search].

The search is started and the search results are displayed.

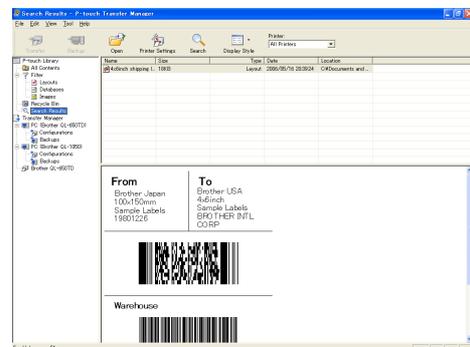

- The search results can be checked in the Search Results folder view.
- You can register the data in the P-touch Library by dragging and dropping to the All contents folder or its list view. To have label templates created with P-touch Editor automatically registered in the P-touch Library, use the following method.
  1. From the P-touch Editor menu, select [Tool] - [Options].
  2. In the [Options] dialog box [General] tab, click [Registration Settings].
  3. Select the timing for registering label templates created with P-touch Editor, then click [OK].

# Creating Labels (For Mac)


## Overview

This section describes the general procedure for creating labels using the printer.

Refer to the sections indicated for details related to each operation, or to the "User's Guide (HTML Manual)". Refer to "How to use the User's Guide (HTML Manual)" on page 56.


### ► Procedure for Creating and Printing Labels

#### 1 Choose the label you want to create.

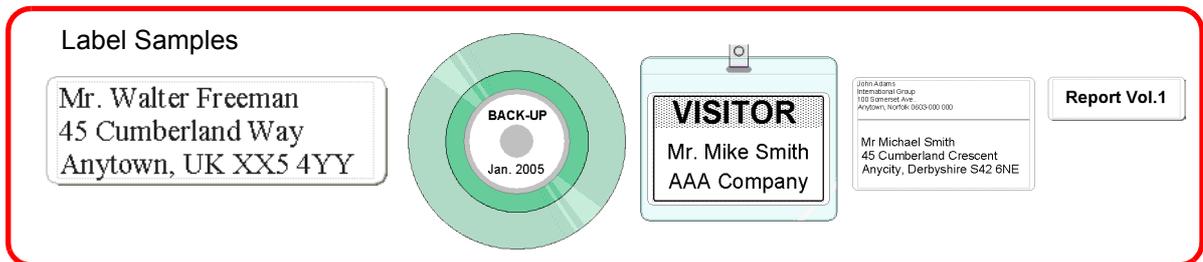


#### 2 Install the appropriate DK Roll for the label you are creating into the printer.

The printer is supplied with one or more sample DK rolls. (Other types of rolls are sold separately.)

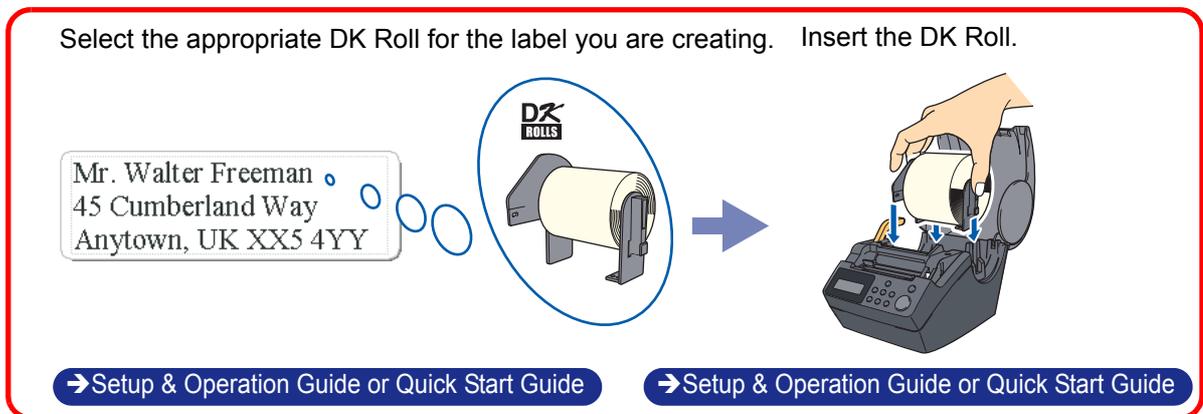

### 3 Create and print the label.

Choose a method for creating and printing the label: using only the printer, or creating the text using an application on the computer.

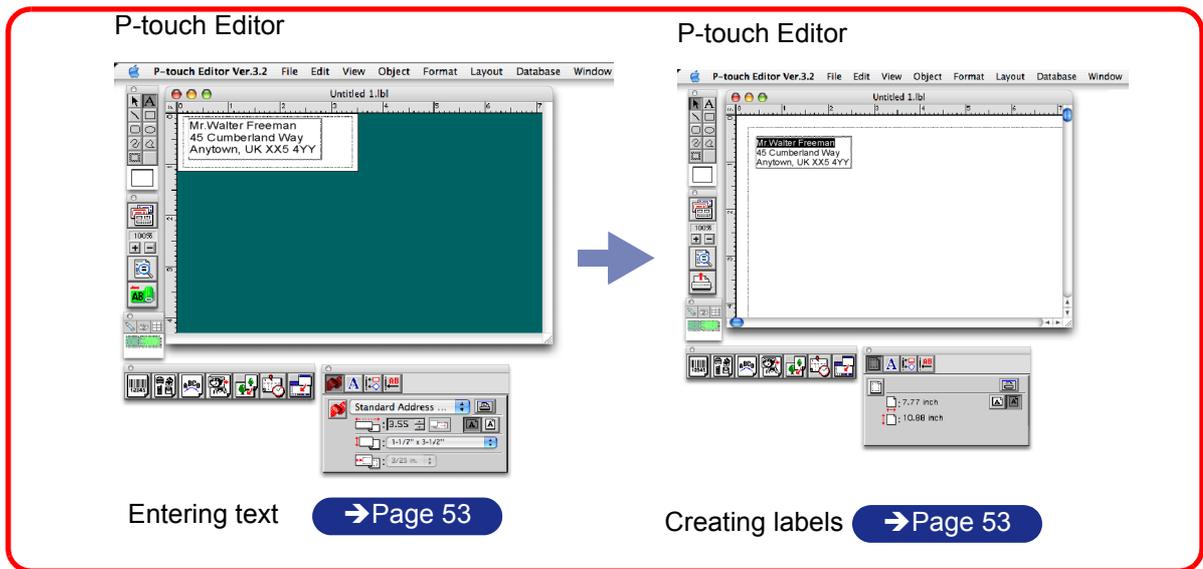

The template downloading function, Add-In function and P-touch Address Book are only available for Windows®.

# Using P-touch Editor



This section gives an overview of P-touch Editor. Refer to the "User's Guide (HTML Manual)" for details.

## ▶ Starting the P-touch Editor

**1** Double-click the [Applications] folder of the drive, where P-touch Editor is installed.  
The [Applications] window is displayed.

**2** Double-click the [P-touch Editor 3.2] folder.

**3** Double-click  .  
P-touch Editor 3.2




If an Alias has been created, double-click the Alias.

The Layout Window is displayed.

## ● Layout Window

The layout window has the following six features.

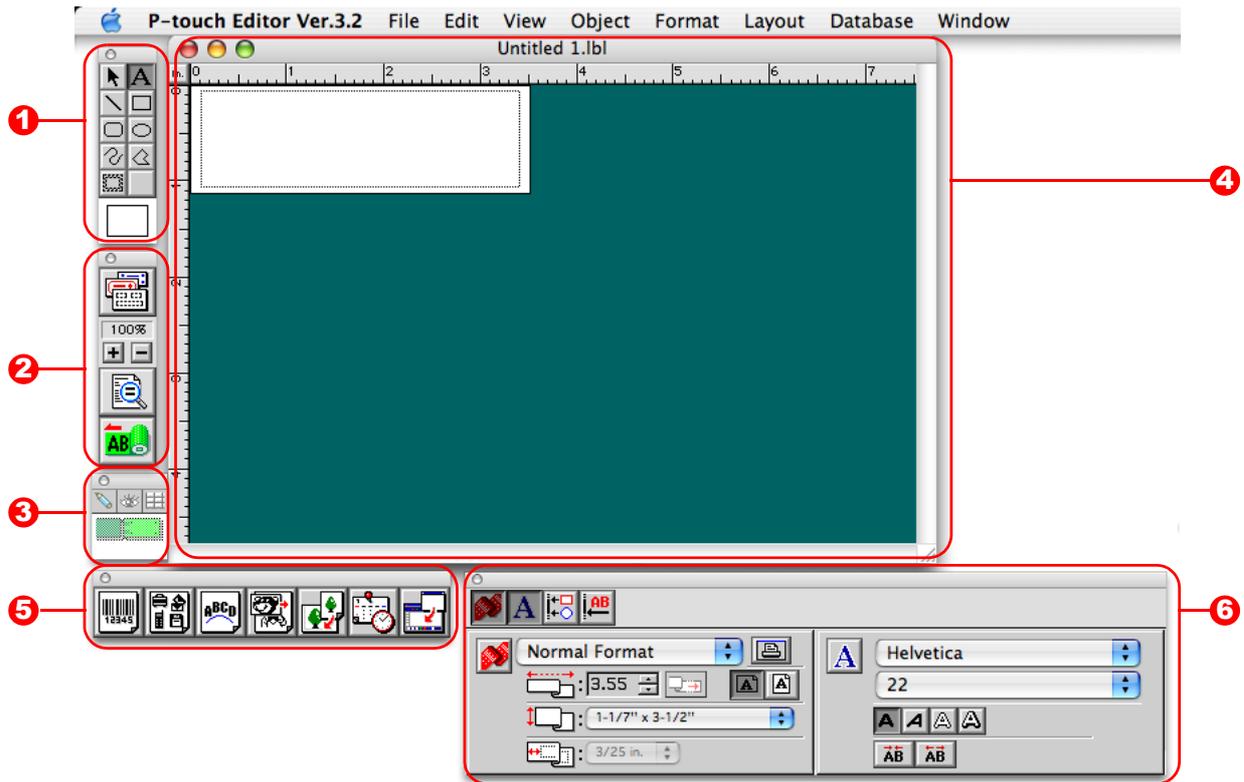





- 1 Draw Toolbar**  
Provides tools for selecting objects, entering text and drawing graphics.
- 2 Print Toolbar**  
Provides print preview display, print setting, auto formatting and enlarging/reducing display features.
- 3 Database Toolbar**  
Provides tools for database features.
- 4 Layout Window**  
Displays the objects inserted for editing.
- 5 Object Dock**  
The object dock is used to quickly insert and arrange text, barcodes, frames, tables and graphics.

Icon	Name	Function
	Barcode	Adds barcodes to the layout.
	Clip Art	Brings up a wide range of illustrations.
	Arrange Text	Changes the shape of the text.
	Make Picture	Makes an illustration by arranging pictures.
	Image	Brings up saved illustrations and photographs.
	Date/Time/Calendar	Displays the date and time as a character, or displays calendar.
	Merge Database Field	Creates a database field.

## 6 Property Dock

Page property, font property, layout property, text property are available.

Click the buttons on the property dock to display and close the property box.

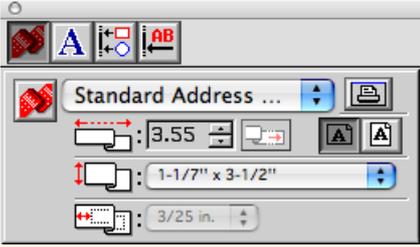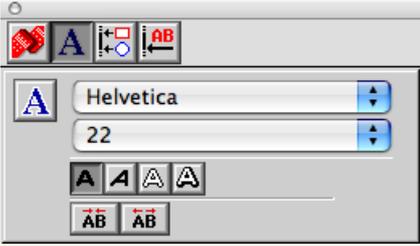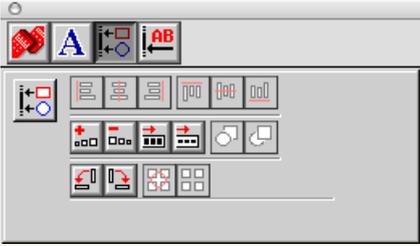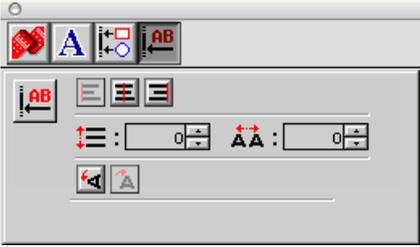Property	Name	Function
	Page Properties	Sets the size and the orientation of the label.
	Font Properties	Sets font, size and text style.
	Layout Properties	Sets an arrangement of character strings and figures.
	Text Properties	Sets alignment and line spacing.

## ► Creating an Address Label


This section describes the process of creating an address label on Mac OS® X 10.3.9 as an example.

### 1 Click on in the Property dock.


The page properties box is displayed.

### 2 Select "Standard Address Label".

- The label format in the layout window changes to Standard Address Label.
- The length and width of the tape are set according to the size of the Standard Address Label.

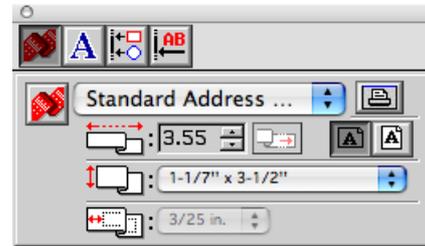

### 3 Click on in the Draw toolbar and enter the name and address.

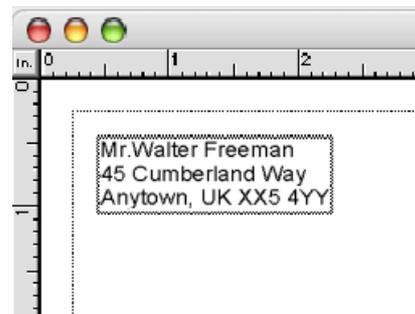

### 4 Click on in the property dock.

The font properties box is displayed.


### 5 Adjust the font size.

Choose the name and change to bold setting () and set the font size in the Text properties box.



The settings changed in the text properties box are applied only to the selected text.

The label should now be ready for printing.  
Refer to [►"Printing the Label"](#) on next page for how to print the labels.

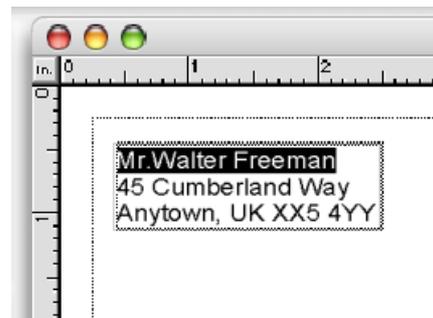


## ▶ Printing the Label

This section describes the printing process for a created label.

- 1 Click on  in the print bar.**  
A dialog for print settings is displayed.



- 2 Select "1" for Copies in the print properties box and then click .**  
The label is printed.

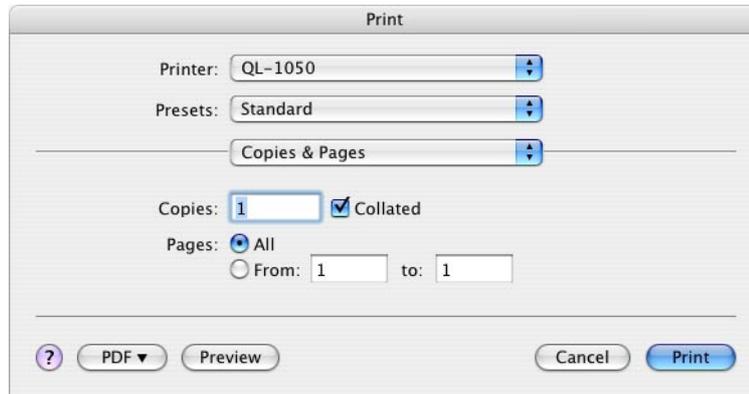

- 3 Cut off the printed label using the CUT button or the CUT lever (Brother QL-500).**



If there is a printing error, an error sign appears on the printer icon in the dock. Click the printer icon and click the utility button in the printer status monitor to display the error information.

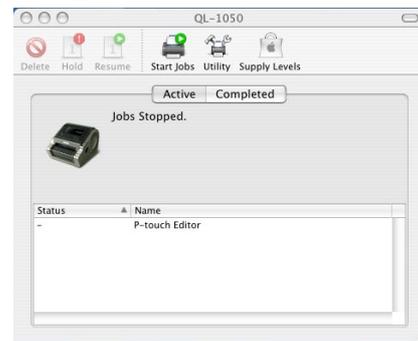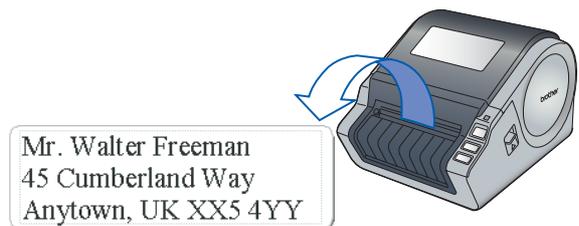


## ● Printing Options

A wide variety of options may be selected in the print dialog box.


A dialog for each setting is displayed after [Copies and Printing Page] is clicked and the item to be changed is selected.

### ■ Copies & Pages

**Copies:** Selects the number of copies to be printed.

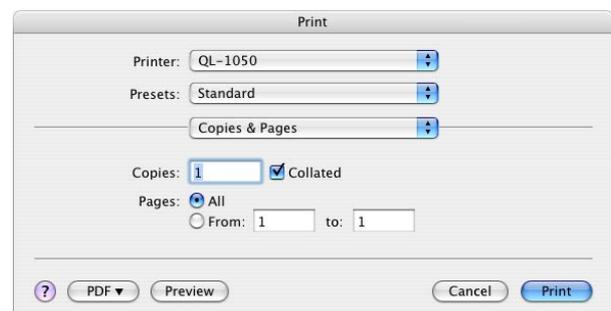


## ■ Roll Setting

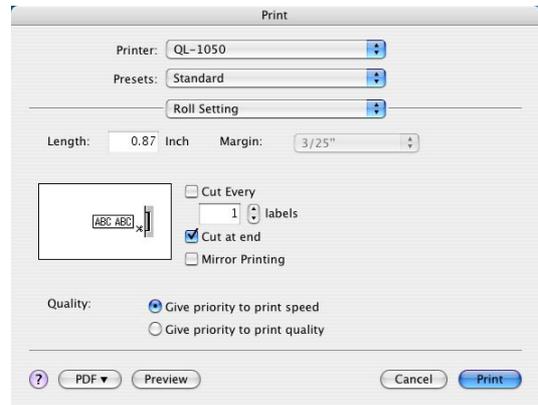

Settings		Details
Length		Specifies the length of the tape.
Margin		Specifies the left and right margins of the tape.
Auto Tape cut (other than the QL-500 ) Cut every xx labels (QL-560/1050/1050N)		When checked, the printed labels are automatically cut after printing. You can also set the number of labels between cuts. When unchecked, the printed labels are not automatically cut after printing. Cut the label by pressing the CUT button.
Cut at end (QL-560/650TD/ 1050/1050N)		When multiple labels are printed, it only cuts after the final label is printed.
Mirror Printing		Prints a mirror image of the label. Use this option to create labels that can be applied to the inner surface of glass, etc. Use clear tape when creating such labels.
Quality	Give Priority to print speed	Use this option to give priority to printing speed.
	Give priority to print quality	Use this option to give priority to print quality.


## ■ Halftone/Colour

Specifies halftone, brightness and contrast.

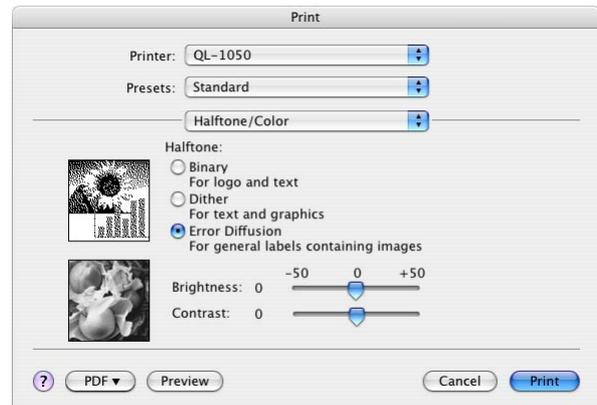


## ■ P-touch Editor

Numbering: Specifies the increment when numbering the labels (serial numbers).

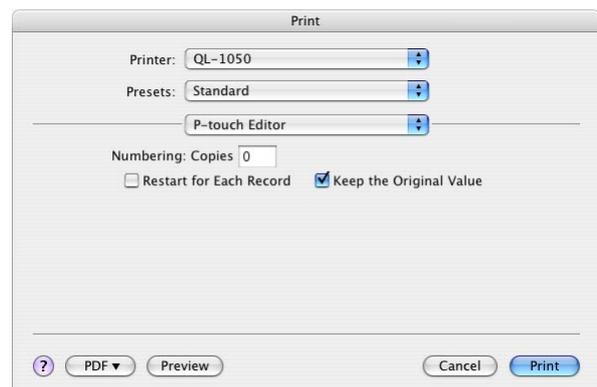

## ■ Summary

Displays the list of print settings.

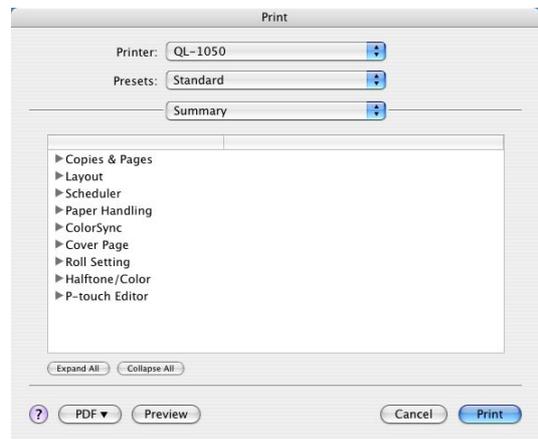

## ▶ How to use the User's Guide (HTML Manual)

The CD-ROM supplied with this printer contains the User's Guide (HTML Manual), which describes how to use P-touch Editor.

The User's Guide (HTML Manual) may be viewed from the CD-ROM or by installing the contents of the CD-ROM onto your Mac®.



The displayed window will differ depending on the OS used.

## ● Installing the User's Guide (HTML Manual)

**1** Double-click the [Mac OS X] folder in the [QL-series] folder on the CD-ROM.

**2** Double-click the [User's Guide] folder.

**3** Double-click the icon  .  
User's Guide Installer



If the [MAIN.HTM] icon is double-clicked at this point, the file on the CD-ROM may be viewed.

The installation window is displayed.

**4** Follow the instructions displayed on the screen and install the folder.

The "User's Guide (HTML Manual)" is installed.


## ● Opening the User's Guide (HTML Manual)

**1** Double-click the [main.htm] icon in the [User's Guide] folder of [P-touchEditor 3.2] installed on the drive.

The browser is launched and the "Main Window" of the "User's Guide (HTML Manual)" is displayed.

# User's Guide (HTML Manual) Window

## ■ Main Window

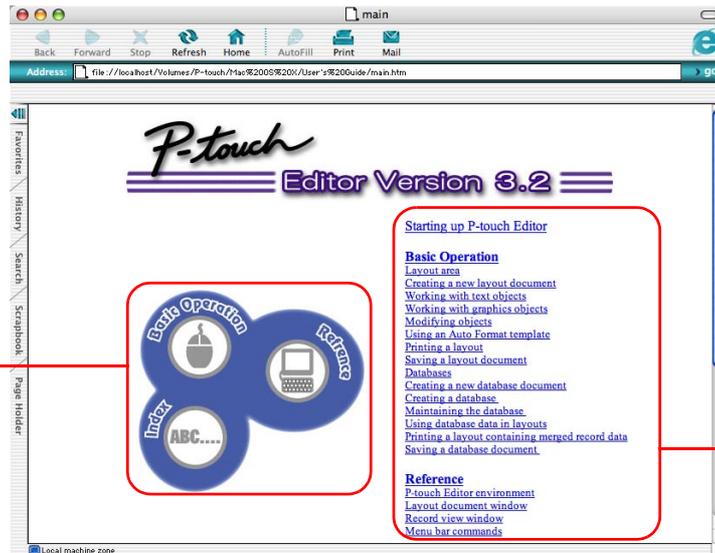


### 1 Main Menu

Operation methods are classified by function. When clicked, the description window is displayed. When [Index] is clicked, a list of keywords is displayed and a search can be made using a keyword.

### 2 Contents

The contents of each menu are classified by item. When clicked, a description window is displayed.

## ■ Main Window

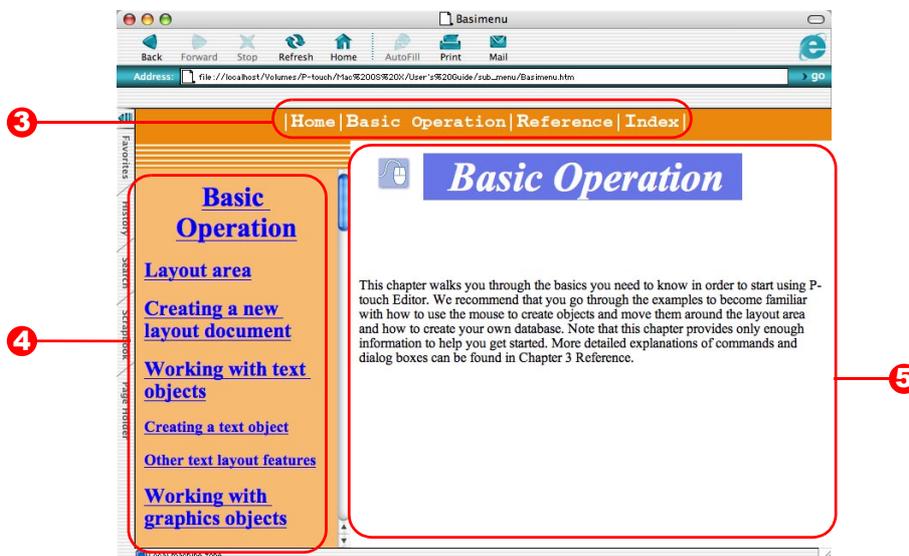

### 3 Menu

The operation methods are classified by function. When clicked, a description window is displayed.

### 4 Detailed Item

The items for each menu are displayed.

### 5 Description Window


The operation methods for the selected items are displayed.

## Sharing the printer

### ▶ Using this printer as a Shared Printer

The Brother QL-Series can be shared by multiple personal computers on a network.

To share the Brother QL-Series, connect the Brother QL-Series to a computer and set it to be a shared device.

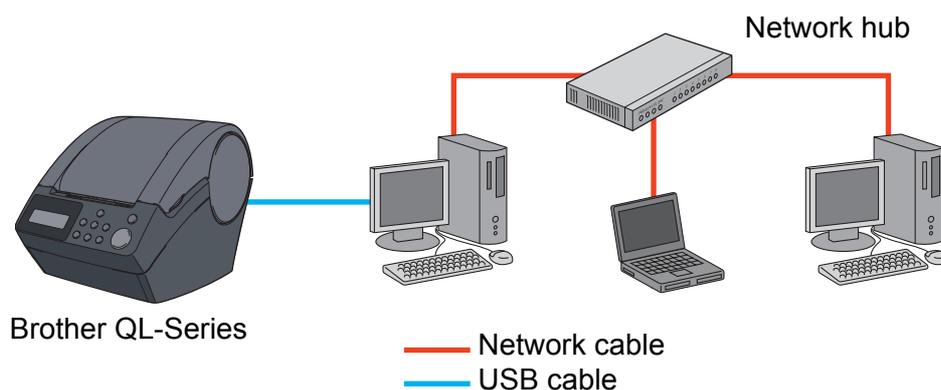


The settings for sharing a printer vary according to the operating system running on the personal computer, and the network environment.

### ▶ Using the PS-9000 Print Server (sold separately)

The Brother QL-Series can also be used as a network printer by connecting it to the PS-9000 print server (sold separately) designed exclusively for label printers.

Providing secure and reliable management of your P-touch network, the PS-9000 is your solution to connecting multiple users to a single P-touch electronic labeling system. The PS-9000 is a USB print server solution for P-touch systems in a 10BASE-T/100BASE-TX network environment.

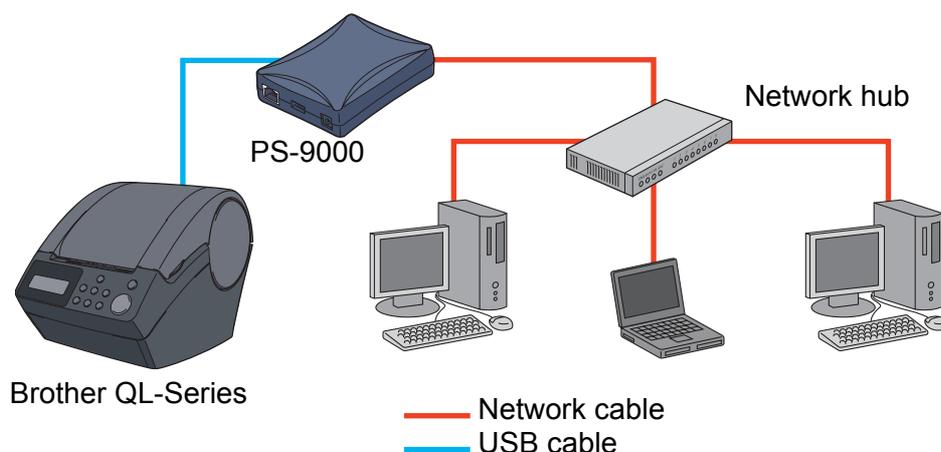

- For PS-9000 setup details, refer to the instruction manual for the PS-9000 print server.
- The PS-9000 comes packed with the QL-1050N. \* QL-1050N is not available in the UK.

# Controlling with the ESC/P Commands

**Brother QL-650TD/  
1050/1050N only**

Descriptions in this section apply only to the functions provided by the Brother QL-650TD/1050/1050N. This function is not available for the QL-500/560.

Fonts and several bar codes are embedded within this printer. You can send commands to print embedded characters and barcodes.

## ► Available Commands

Commands available are P-touch proprietary commands based on ESC/P.  
For details, refer to the "Command Reference" included in the CD-ROM.  
([CD Drive]:\Doc\Technical)

## ► Serial Cables

The pin assignments for the serial cables (RS-232C cables) which can be used with this printer are shown in the table below. You can purchase the cables at an electronics store. Do not use cables exceeding 3 meters in length.

Brother QL-650TD/1050 side

(D-sub female, lock screw #4-40 inch screw)

PC side

(D-Sub9P female)

Signal Name	Pin Number	Pin Assignments	Pin Number	Signal Name
DCD	1		1	DCD
RXD	2		2	RXD
TXD	3		3	TXD
DTR	4		4	DTR
GND	5		5	GND
DSR	6		6	DSR
RTS	7		7	RTS
CTS	8		8	CTS
RI	9		9	RI



- It is not possible to connect an RS-232C cable and a USB cable to the printer at the same time and use it. Connect only one cable which is used to communicate with the printer.
- The RS-232C serial connector part of this equipment is not Limited Power Source.

# Printing Directly from Other Applications

You can use this printer to print directly from most Windows® applications, by installing the printer driver.



Because the paper size for this printer is different from other regular printers, you may not be able to print even after installing the driver and application software, unless the application software allows the correct label size to be set.

## ▶ Installing the Printer Driver


### 1 From [Control Panel], open [Printers and Faxes (Printers)].



For details, refer to Windows® Help.

### 2 Select "Brother QL-500/560/650TD/1050/1050N", and click [File]-[Printing Preferences].


The [Printer Properties] dialog box appears.

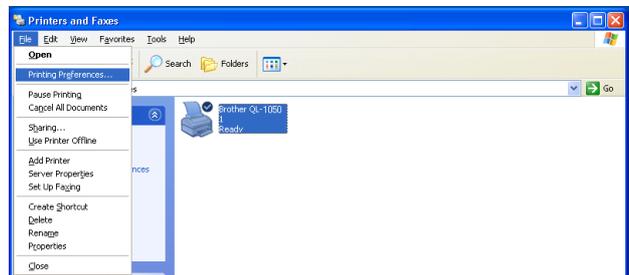

### 3 Select each item and click .

- [Paper] Tab

This tab is used to set the Format and Width.

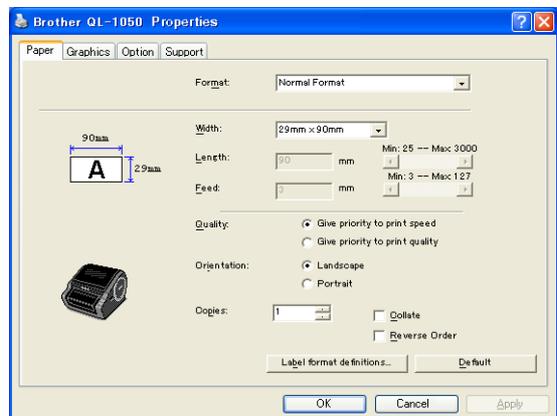


You can change the Label Format or create a new Label Format from the [Label Format definitions] dialog box which appears by clicking


.

Set the format name ("Name") and size ("Width", "Length", and "Feed"), and click

.

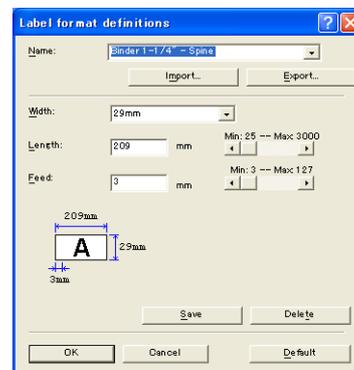


- [Graphics] Tab  
You can set "Halftone", "Brightness", and "Contrast" in this tab.

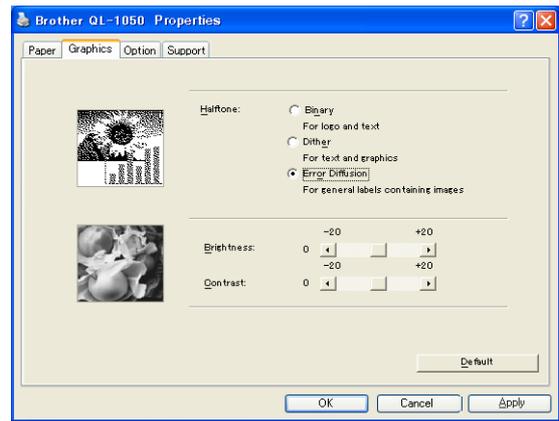

- [Option] Tab  
You can set "Auto cut" with number of labels between cuts, "Mirror Printing", "Cut at end", and "Unit" in this tab.



The cutting options will vary according to the model.

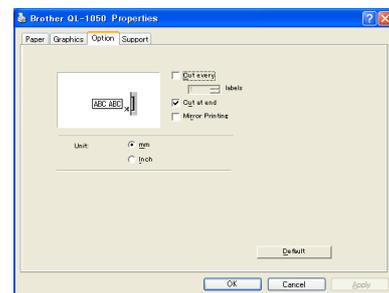

#### 4 Close the [Printers and Faxes (Printers)] window.

## ▶ Printing from Other Applications


We will use Microsoft® Word as an example.

### 1 Click [File]-[Print].

The [Print] dialog box appears.

### 2 Select "Brother QL-500/560/650TD/1050/1050N".

You can change the settings of the Printer Driver from the [Printer Properties] dialog box which appears by clicking .

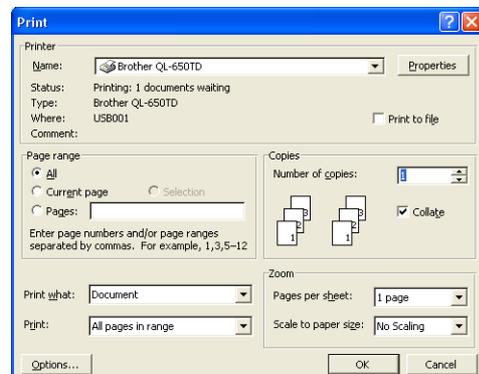

### 3 Click , and close the [Print] dialog box.


### 4 Click [File]-[Page Setup].

The [Page Setup] dialog box appears.

### 5 Click the [Paper Size] tab, and select the paper size that you want to print.

You can also select the Label Format that you have added in → [Page 60](#).

Set page margins in the [Margins] tab as well.

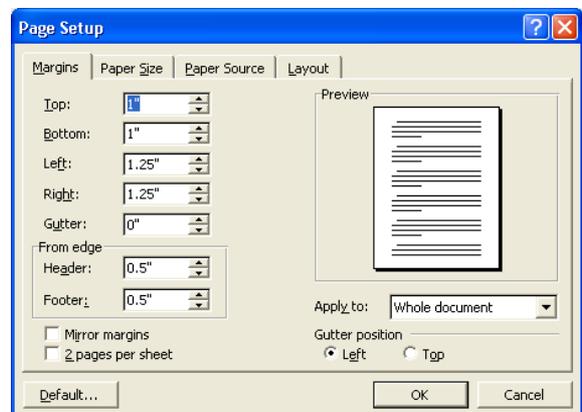

### 6 Click .

The size of the Microsoft® Word window is adjusted to the paper size that you have just selected. Edit the document as needed.

### 7 Click [File]-[Print].

The [Print] dialog box appears.

### 8 Click .

The specified labels are printed.

# Uninstalling Software

This section describes how to uninstall the software and printer driver.

## ► For Windows


### ● Uninstalling P-touch Editor

#### 1 Click [Start]-[Control Panel]-[Add or Remove Programs].

The [Add or Remove Programs] dialog appears.

#### 2 Select "Brother P-touch Editor 4.2", and click .

The [Confirm Uninstall] dialog box appears.

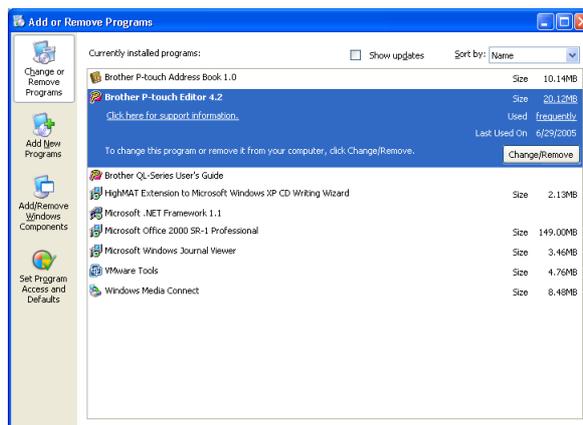

#### 3 Click .

The uninstall operation starts. After the software and printer driver are removed from your computer, the [Maintenance Complete] dialog box appears.



#### 4 Click .



#### 5 Close the [Add or Remove Programs] dialog.

P-touch Editor has been uninstalled.



The P-touch Address Book, and Software User's Guide (PDF Manual) can also be uninstalled by following the same procedure.

## ● Uninstalling the Printer Driver


**1** Turn off the Brother QL-500/560/650TD/1050/1050N.

**2** From [Control Panel], open the [Printers and Faxes (Printers)] window.



For details, refer to Windows® Help.

**3** Select "Brother QL-500/560/650TD/1050/1050N", and click [File]-[Delete].

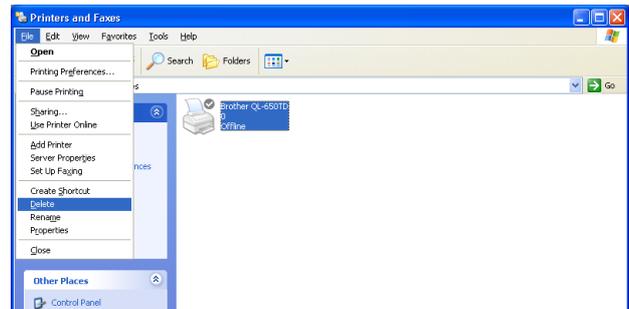

**4** Close the [Printers and Faxes (Printers)] window.

The printer driver has been uninstalled.

## ▶ For Mac

### ● Uninstalling P-touch Editor


**1** On the drive where P-touch Editor is installed, double-click the [Applications] folder-[P-touch Editor 3.2] folder-[Uninstall P-touch] folder-[UninstallPtEditor.command]. [Terminal] window appears, and then uninstall operation starts.



Administrator rights is required for the uninstall operation.



In case [Terminal] window doesn't appear by double-clicking the [UninstallPtEditor.command], right click (or control key + click) the [UninstallPtEditor.command], the context menu appears. Open with the [terminal] window from the context menu.

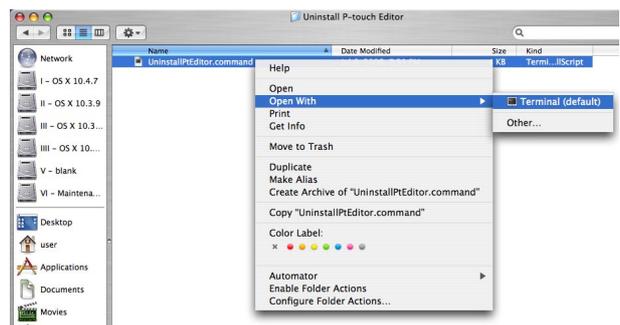

## 2 Click .



```
Completed Command
Last login: Fri Jul 7 20:46:21 on console
Welcome to Darwin!
PHCPMAC01-Power-Mac-G4:~ user$ /Applications/P-touch\ Editor\ 3.2/Uninstall\ P-t
ouch/UninstallPEditor.command; exit
logout
[Process completed]
```

## 3 Delete [Applications]-[P-touch Editor 3.2] folder.

 Before you delete the [P-touch Editor 3.2] folder, please check if any necessary files are saved in it.

P-touch Editor has been uninstalled.

## ● Uninstalling the Printer Driver

### 1 Turn off the Brother QL-500/560/650TD/1050/1050N.

### 2 Double-click the drive where Mac OS® X is installed, and double-click [Applications]-[Utility (Utilities)]-[Printer Setup Utility (Print Center)].

The [Printer List] dialog box appears.

### 3 Select "Brother QL-500/560/650TD/1050/1050N", and click (Delete).



### 4 Close the [Printer List] dialog box.

The printer driver has been uninstalled.

# Specifications

## ▶ Product Specifications

Items		Specifications		
		Brother QL-500/560	Brother QL-650TD	Brother QL-1050
Display		LED lamp (green)	LED lamp (green) LCD (16 digits × 2 rows (5 × 7 dot/character))	LED lamp (green, red, orange)
Printing	Printing method	Direct thermal printing via thermal head		
	Printing speed	Max. 90 mm/sec, Max. 50 labels/min. (address label) (Brother QL-500) Max. 90 mm/sec, Max. 56 labels/min. (address label) (Brother QL-560)	Max. 90 mm/sec, Max. 56 labels/min. (address label)	Max. 110 mm/sec, Max. 69 labels/min. (address label)
	Print head	300 dpi/720 dot		300 dpi/1296 dot
	Maximum Printing Width	59 mm		98.6 mm
	Minimum printing length	25.4 mm		
Buttons		ON/OFF button (⏻) FEED button (⏴) CUT button (✂) (Brother QL-560 only)	ON/OFF button (⏻) FEED button (⏴), CUT button (✂) PRINT button (⏴), MENU button ESC button, OK button UP button (▲), DOWN button(▼)	ON/OFF button (⏻) FEED button (⏴) CUT button (✂)
Interface		USB port	USB, Serial (RS-232C)	
Power source		220-240V AC 50/60 Hz (0.9A)	220-240V AC 50/60 Hz (0.9A)	220-240V AC 50/60 Hz (1.1A)
Dimensions		146 (W) × 196 (D) × 152 (H) mm	146 (W) × 196 (D) × 152 (H) mm	170 (W) × 220 (D) × 147.5 (H) mm
Weight		Approx. 1.3 kg (Without DK Rolls)	Approx. 1.3 kg (Without DK Rolls)	Approx. 1.7 kg (Without DK Rolls)
Cutter		Automatic cutter (Brother QL-560) Manual cutter (Brother QL-500)	Automatic cutter	Durable automatic cutter
Network		Option (PS-9000)		PS-9000 Bundle (Brother QL-1050N) * QL-1050N is not available in the UK.

## ▶ Operating Environment

Items		Specifications		
		Brother QL-500/560	Brother QL-650TD	Brother QL-1050
OS	Windows®	Windows® 2000 Professional/XP *1 / Windows Vista™		
	Mac®	Mac OS® X 10.2 ~ 10.4.9*2		
Interface	Windows®	USB port (USB Spec. 1.1 or 2.0 protocol)	USB port (USB Spec. 1.1 or 2.0 protocol) Serial (RS-232C) *3	
	Mac®	USB port (USB Spec. 1.1 or 2.0 protocol)	USB port (USB Spec. 1.1 or 2.0 protocol)	
Hard Drive	Windows®	Over 70 MB of available space *4		
	Mac®	Over 100 MB of available space *4		
Memory	Windows®	Windows® 2000 Professional/XP: More than 128 MB Windows Vista™: More than 512 MB		
	Mac®	More than 128 MB		
Monitor	Windows®	SVGA, high colour or higher graphics card		
	Mac®	More than 256 colours		
Other		CD-ROM drive		
Operating Temperature		10°C to 35°C		
Operating Humidity		20% to 80% (without condensation)		

\*1 The PC should meet Microsoft®'s recommendations for the OS installed.

\*2 PS-9000 does not support Mac. So QL-1050N is not used in Mac environment.

\*3 The RS-232C interface is required when printing with ESC/P commands.

\*4 Required available space when installing the software with all of the options.